

Product Overview

The CMD297 is an analog phase shifter die which operates from 5 to 18 GHz. The phase shifter utilizes a single positive control voltage of 0V to +10V to control relative phase shift over a 550 degree range at 7 GHz and a 240 degree range at 12 GHz. The CMD297 has consistent insertion loss versus phase shift and the phase shift is monotonic with respect to control voltage. The phase shifter is a 50 ohm matched design which eliminates the need for external DC blocks and RF port matching. The CMD297 offers full passivation for increased reliability and moisture protection.


Key Features

- Wide Bandwidth
- Wide Phase Shift Range
- Single Positive Control Voltage
- Small Die Size: 1220 um x 2600 um

Ordering Information

Part No.	Description
CMD297	5-18 GHz Analog Phase Shifter, 100 Piece Gel Pack

Functional Block Diagram

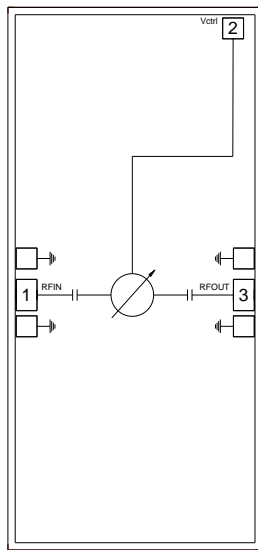

Electrical Performance ($V_{ctrl} = 0\text{ V to }+10\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$, $F = 12\text{ GHz}$)

Parameter	Min	Typ	Max	Units
Frequency Range		5 - 18		GHz
Phase Shift Range		240		degrees
Insertion Loss		3		dB
Input Return Loss		10		dB
Output Return Loss		10		dB
Phase Voltage Sensitivity		24		deg/Volt

Absolute Maximum Ratings

Parameter	Rating
Control Voltage, V_{ctl}	+ 11 V
Reverse Current	5 mA
RF Input Power	+30 dBm
Channel Temperature, T_{ch}	150 °C
Power Dissipation, P_{diss}	2 W
Thermal Resistance, θ_{JC}	32.2 °C/W
Operating Temperature	-55 to 85 °C
Storage Temperature	-55 to 150 °C

Exceeding any one or combination of the maximum ratings may cause permanent damage to the device.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
V_{ctl}	0		10	V


Electrical performance is measured at specific test conditions. Electrical specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications ($V_{ctl} = 0$ V to +10 V, $T_A = 25$ °C)


Parameter	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	5 - 10			10 - 13			13 - 18			GHz
Phase Shift Range	240	500		150	250		70	150		degrees
Insertion Loss		7	17		3.5	8		2.5	7	dB
Input Return Loss		10			10			8		dB
Output Return Loss		10			10			8		dB
Control Voltage Range	0		10	0		10	0		10	Volts
Phase Voltage Sensitivity		57			24			9		deg/Volt
Phase Temperature Sensitivity		0.15			0.1			0.05		deg/°C

Typical Performance

Insertion Loss vs. Control Voltage @ 12 GHz

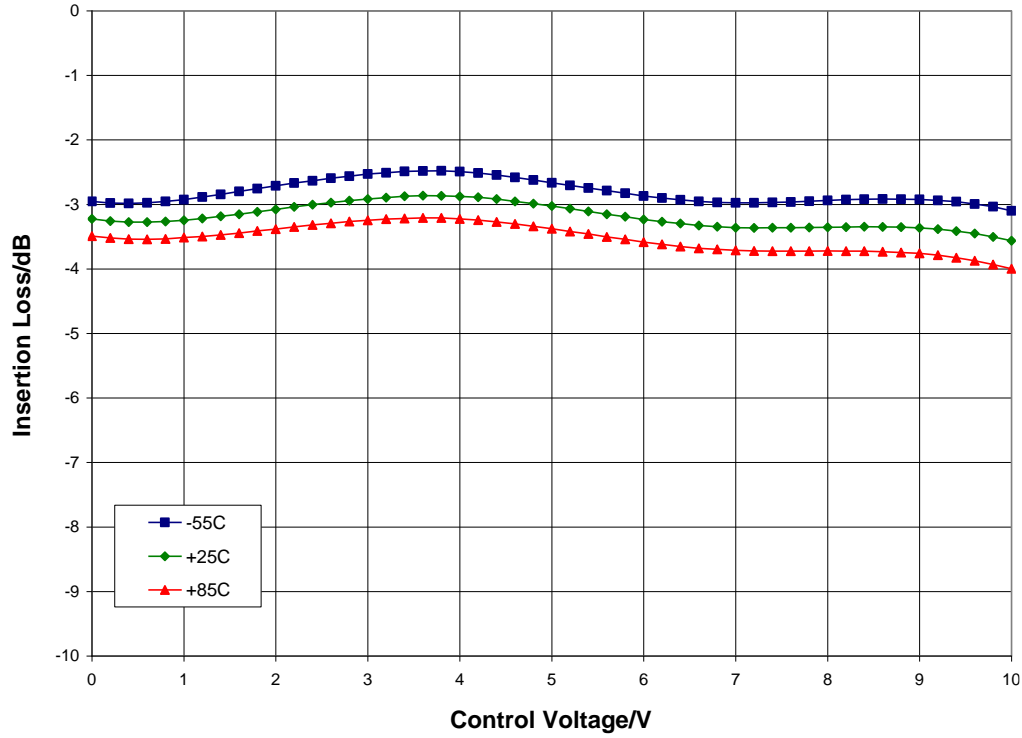


Phase Shift vs. Control Voltage, T_A = 25 °C

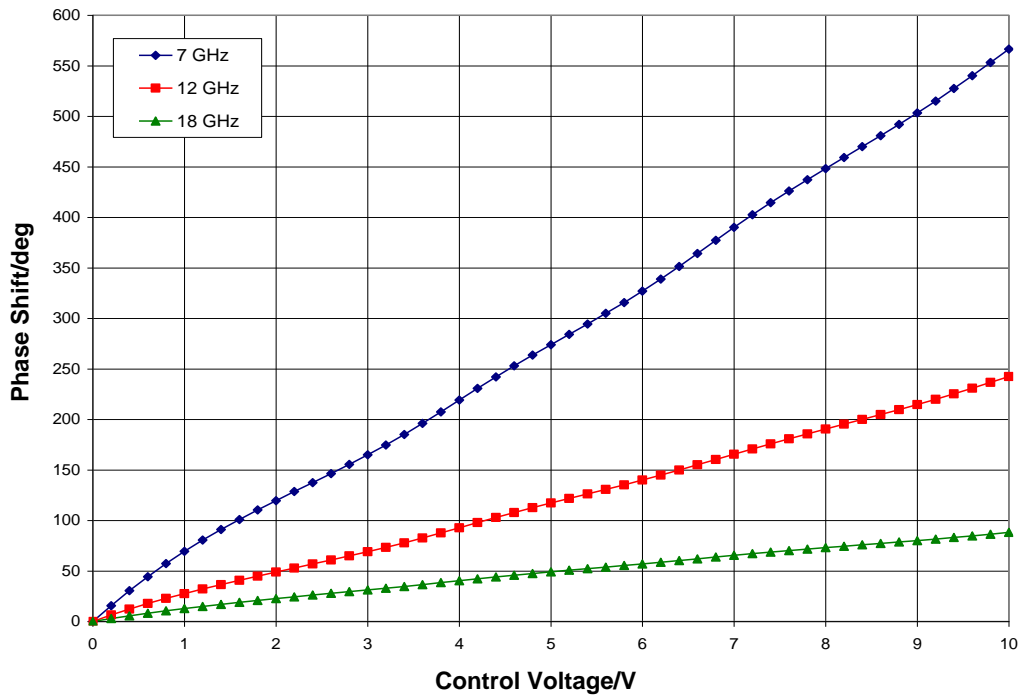


Typical Performance

Phase Shift vs. Frequency @ $V_{ctl} = 10V$ (Relative to $V_{ctl} = 0 V$)

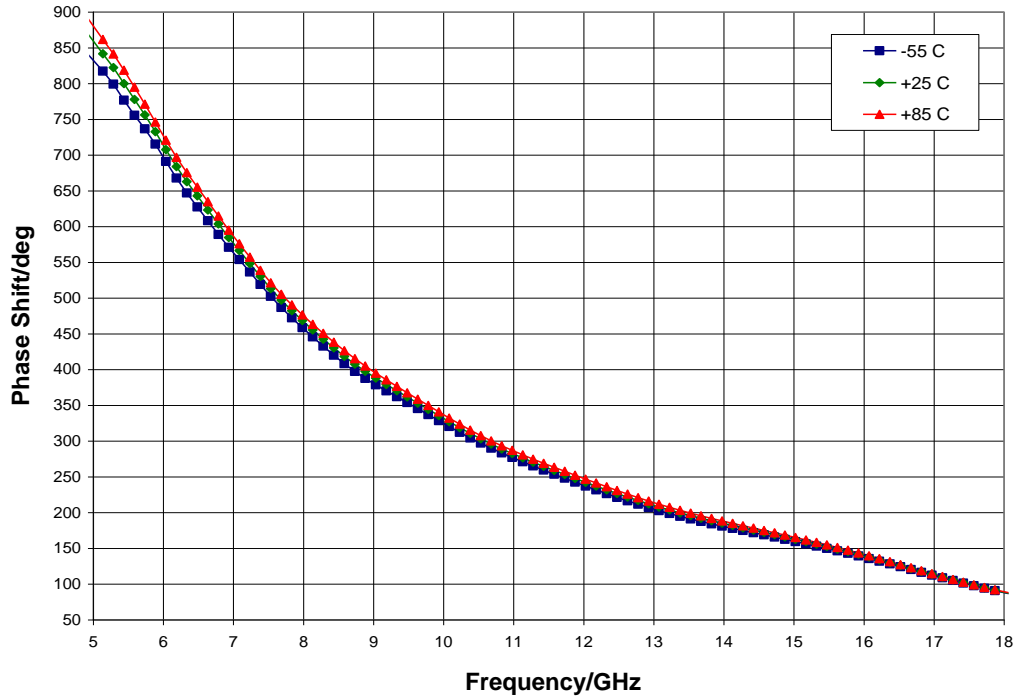


Insertion Loss vs. Frequency, $T_A = 25\text{ }^\circ\text{C}$

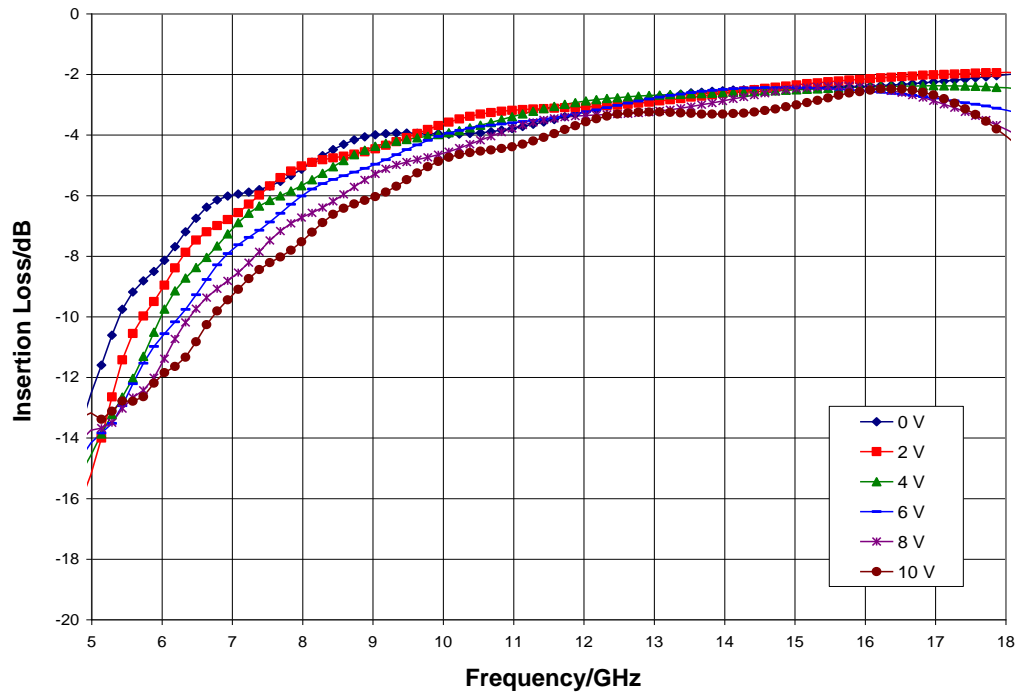


Typical Performance

Input Return Loss, $T_A = 25\text{ }^\circ\text{C}$

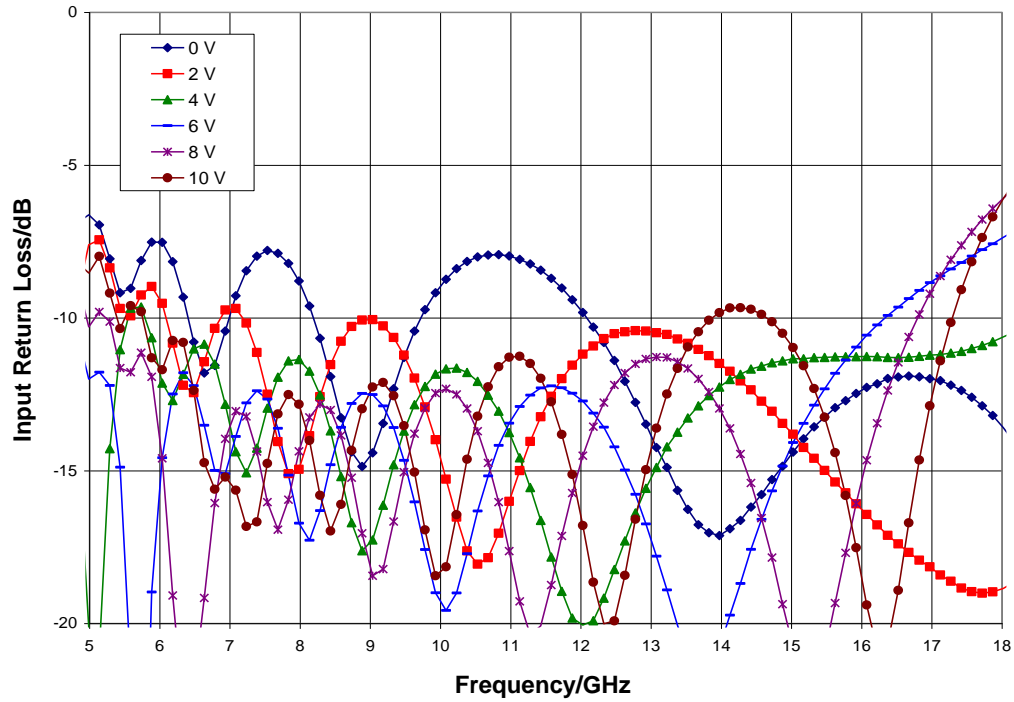


Output Return Loss, $T_A = 25\text{ }^\circ\text{C}$

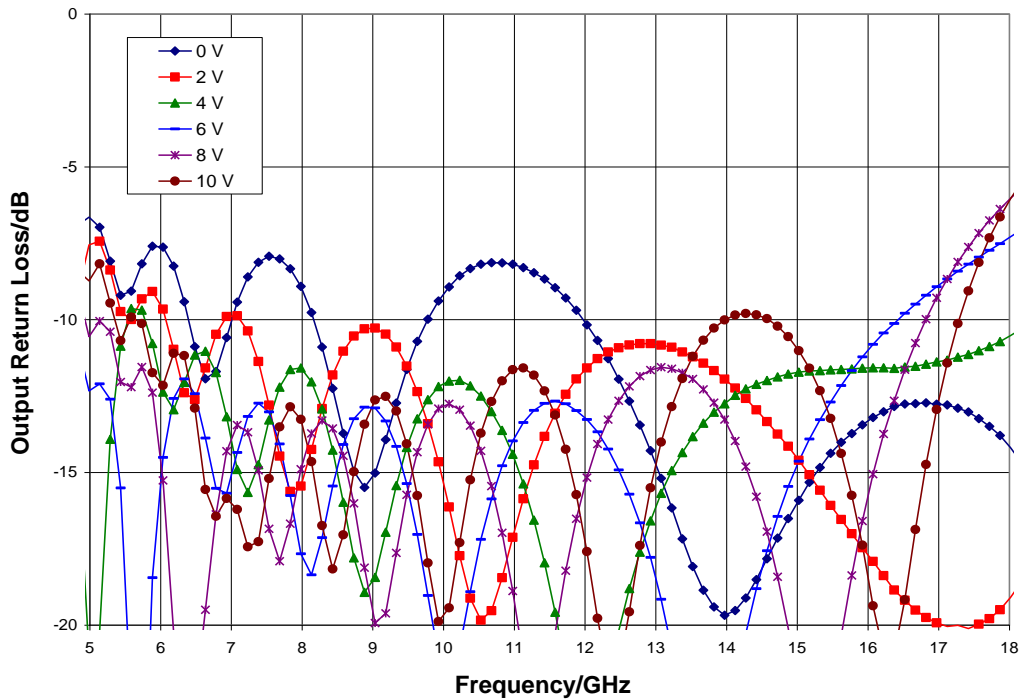


Typical Performance

Insertion Loss vs. Pin @ 7 GHz, $V_{ctl} = 0\text{ V}$

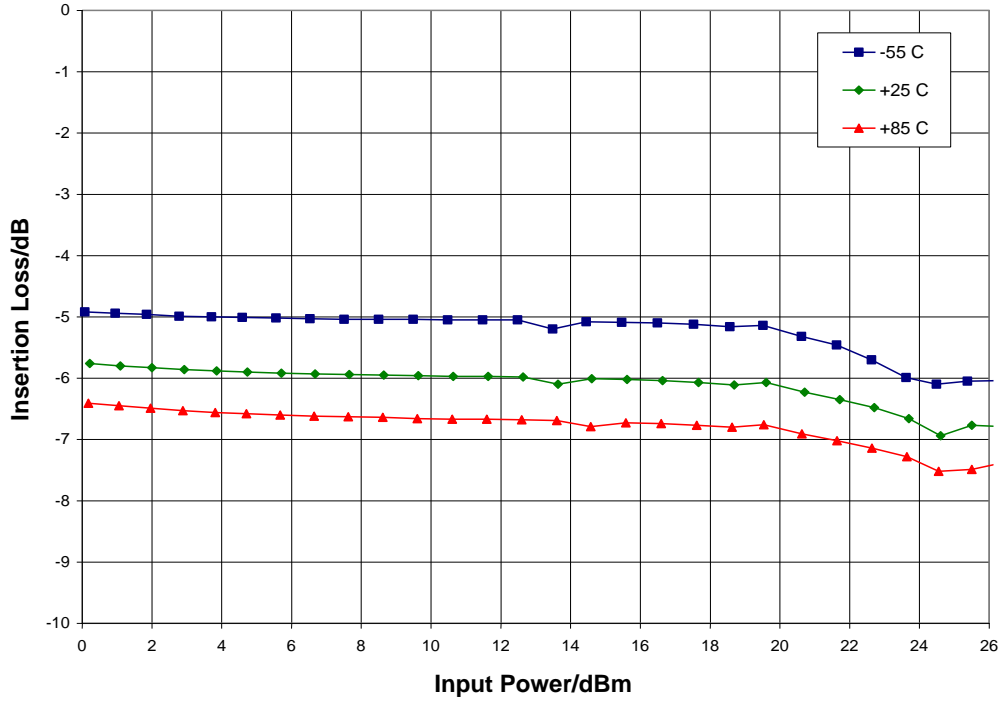


Insertion Loss vs. Pin @ 12 GHz, $V_{ctl} = 0\text{ V}$

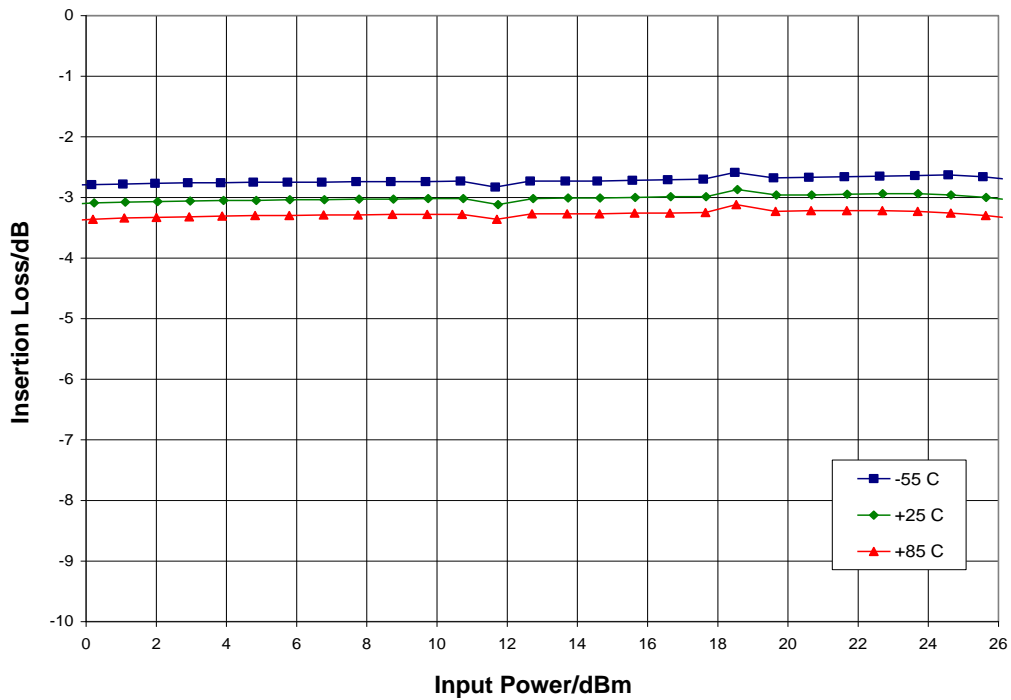


Typical Performance

Insertion Loss vs. Pin @ 18 GHz, $V_{ctl} = 0\text{ V}$

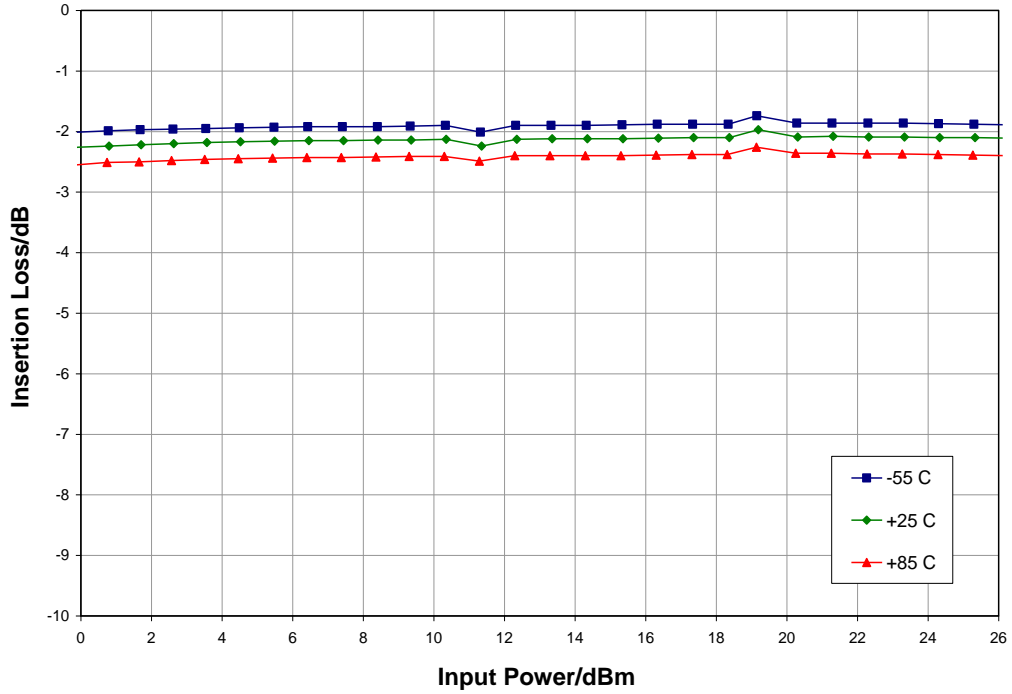


Input IP3 vs. Control Voltage, $T_A = 25\text{ °C}$

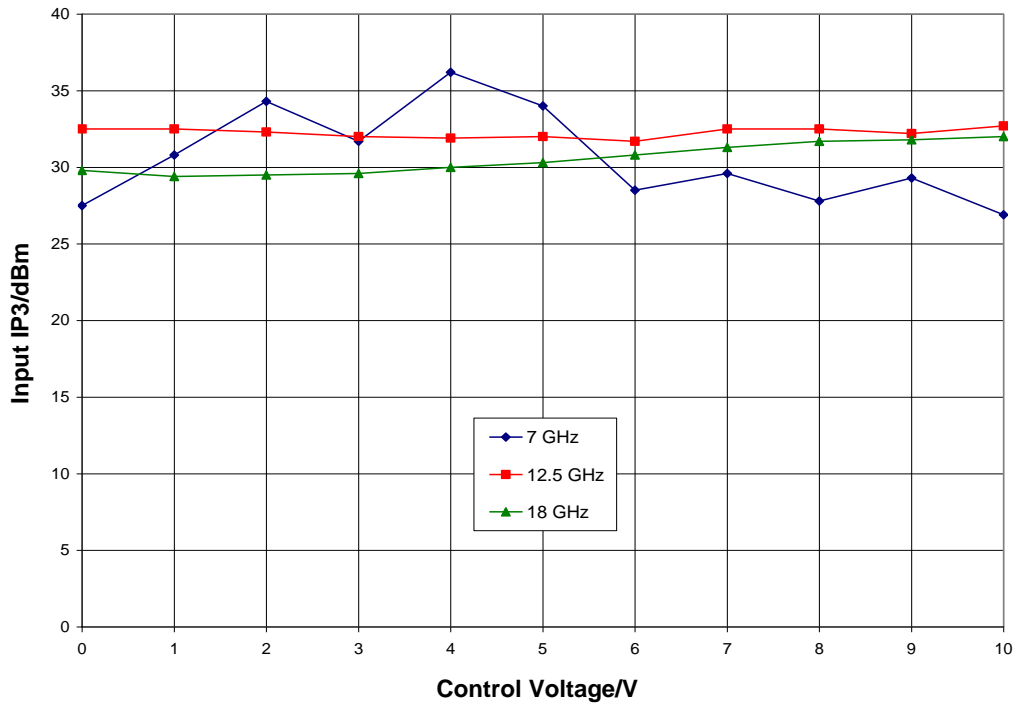

Mechanical Information

Die Outline (all dimensions in microns)

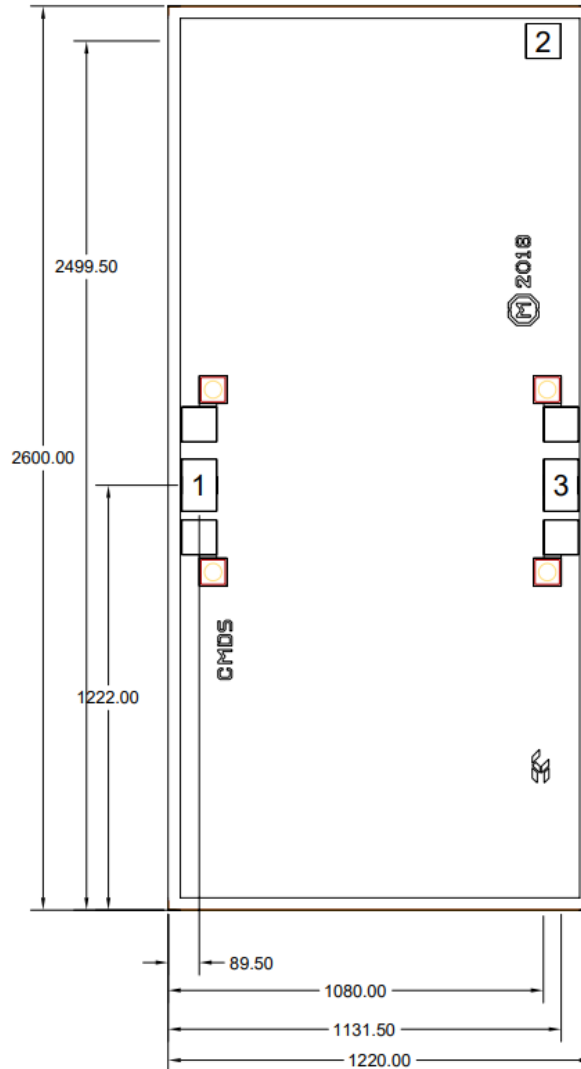


Notes:

1. No connection required for unlabeled pads
2. Backside is RF and DC ground
3. Backside and bond pad metal: Gold
4. Die is 100 microns thick
5. DC bond pad (2) is 100 x 100 microns
6. RF bond pads (1, 3) are 100 x 150 microns

Pad Description

Pad Diagram

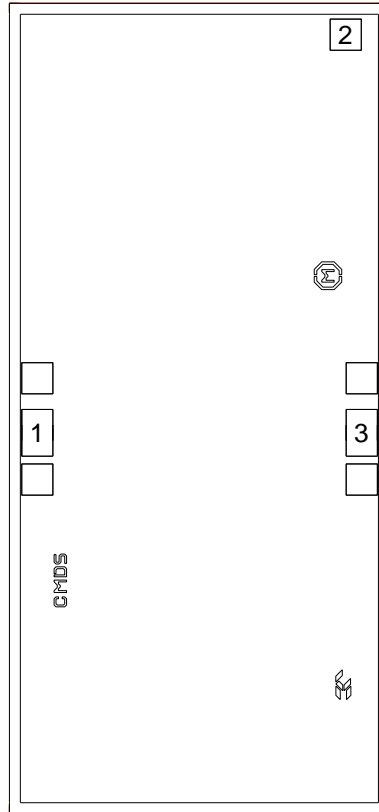

Functional Description

Pad	Function	Description	Schematic
1	RF in	DC blocked and 50 ohm matched	
2	V_{ctrl}	Control voltage	
3	RF out	DC blocked and 50 ohm matched	
Backside	Ground	Connect to RF / DC ground	

Applications Information


Assembly Guidelines

The backside of the CMD297 is RF ground. Die attach should be accomplished with electrically and thermally conductive epoxy only. Eutectic attach is not recommended. Standard assembly procedures should be followed for high frequency devices. The top surface of the semiconductor should be made planar to the adjacent RF transmission lines, and the RF decoupling capacitors placed in close proximity to the DC connections on chip.

RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 0.8 mil thermosonic wedge bonding is highly recommended as the loop height will be minimized. The RF input and output require a single bond wire as shown.

The semiconductor is 100 um thick and should be handled by the sides of the die or with a custom collet. Do not make contact directly with the die surface as this will damage the monolithic circuitry. Handle with care.

Assembly Diagram

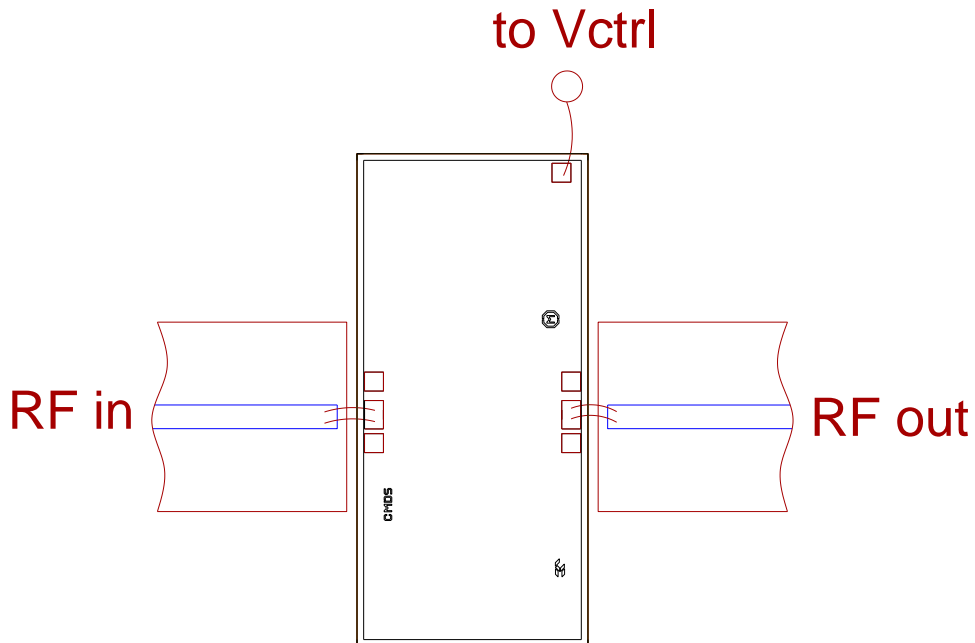

GaAs MMIC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

Applications Information

Biasing and Operation

The CMD297 has a single control voltage (V_{ctrl}). Full phase shift range is achieved when V_{ctrl} is varied from 0 to +10 V.

RF power can be applied at any time.

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1A	ESDA / JEDEC JS-001-2012



Caution!
 ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- SVHC Free
- Halogen Free
- PFOS Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained in this Data Sheet and any associated documents (“Data Sheet Information”) is believed to be reliable; however, Qorvo makes no warranties regarding the Data Sheet Information and assumes no responsibility or liability whatsoever for the use of said information. All Data Sheet Information is subject to change without notice. Customers should obtain and verify the latest relevant Data Sheet Information before placing orders for Qorvo® products. Data Sheet Information or the use thereof does not grant, explicitly, implicitly or otherwise any rights or licenses to any third party with respect to patents or any other intellectual property whether with regard to such Data Sheet Information itself or anything described by such information.

DATA SHEET INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo® products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. Applications described in the Data Sheet Information are for illustrative purposes only. Customers are responsible for validating that a particular product described in the Data Sheet Information is suitable for use in a particular application.

© 2022 Qorvo US, Inc. All rights reserved. This document is subject to copyright laws in various jurisdictions worldwide and may not be reproduced or distributed, in whole or in part, without the express written consent of Qorvo US, Inc. | QORVO® is a registered trademark of Qorvo US, Inc.