

### Product Description



Qorvo's TGA2595-CP is a balanced Ka-Band power amplifier fabricated on Qorvo's QGaN15 0.15  $\mu\text{m}$  GaN on SiC process. The balanced configuration supports low return loss and improves robustness into non-ideal loads. Operating from 27.5 to 31 GHz, the TGA2595-CP achieves 39 dBm saturated output power with power-added efficiency of > 22 % and power gain of 21 dB.

The TGA2595-CP is packaged in a 10-lead 15x15 mm bolt-down package with a Cu base for superior thermal management. To simplify system integration, the TGA2595-CP is fully matched to 50 ohms with integrated DC blocking capacitors on both I/O ports.

The TGA2595-CP is ideally suited for both commercial and defense satellite communications.

Lead free and RoHS compliant.

### Functional Block Diagram

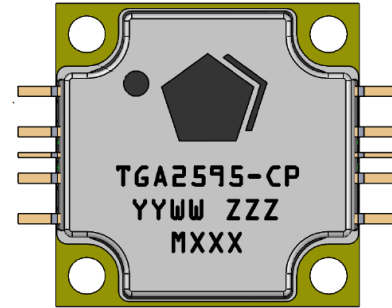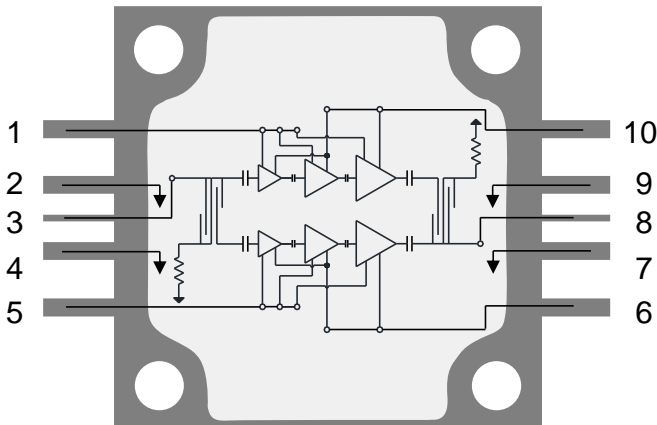

### Product Features

- Frequency Range: 27.5 – 31 GHz
- $P_{OUT}$ : 39 dBm ( $P_{IN} = 18$  dBm)
- PAE: > 22 % ( $P_{IN} = 18$  dBm)
- Power Gain: 21 dB ( $P_{IN} = 18$  dBm)
- IM3 @ 30 dBm/Tone = -27 dBc
- IM5 @ 30 dBm/Tone = -46 dBc
- Bias:  $V_D = +20$  V,  $I_{DQ} = 560$  mA,  $V_G = -2.5$  V typical
- Package Dimensions: 15.2 x 15.2 x 5.2 mm
- Package base is pure Cu offering superior thermal management

### Applications

- Satellite Communications

### Ordering Information

Part No.	Description
TGA2595-CP	27.5 – 31 GHz 8 W GaN Power Amplifier
1095829	TGA2595-CP Evaluation Board



# TGA2595-CP

## 27.5 – 31 GHz 8 W GaN Power Amplifier

### Absolute Maximum Ratings

Parameter	Value / Range
Drain Voltage ( $V_D$ )	29.5 V
Gate Voltage Range ( $V_G$ )	-5 to 0 V
Drain Current ( $I_D$ )	2.8 A
Gate Current ( $I_G$ )	See plot at page 10
Power Dissipation ( $P_{DISS}$ ), 85 °C	48 W
Input Power, CW, 50 $\Omega$ , ( $P_{IN}$ )	30 dBm
Input Power, CW, VSWR 6:1, $V_D = +22$ V, 85 °C, ( $P_{IN}$ )	25 dBm
Channel Temperature ( $T_{CH}$ )	275 °C
Soldering Temperature (30 Seconds)	260 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Recommended Operating Conditions

Parameter	Min	Typ.	Max	Units
Drain Voltage ( $V_D$ )		+20		V
Drain Current, ( $I_{DQ}$ )		560		mA
Drain Current, RF ( $I_{D\_Drive}$ )	See chart page 5			mA
Gate Voltage Range ( $V_G$ )	-2 to -2.9			V
Gate Current, RF ( $I_{G\_Drive}$ )	See chart page 5			mA
$T_{BASE}$ Range	-40		+85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.






### Electrical Specifications

Parameter	Min	Typ	Max	Units
Operational Frequency Range	27.5	-	31	GHz
Small Signal Gain	-	> 25	-	dB
Input Return Loss	-	> 12	-	dB
Output Return Loss	-	> 13	-	dB
Output Power (at $P_{IN} = 18$ dBm)	-	39	-	dBm
Power Added Efficiency (at $P_{IN} = 18$ dBm)	-	> 22	-	%
Power Gain (at $P_{IN} = 18$ dBm)	-	21	-	dB
IM3 @ 30 dBm/Tone	-	-27	-	dBc
IM5 @ 30 dBm/Tone	-	-46	-	dBc
Output Power Temperature Coefficient (25 °C to 85 °C only)	-	-0.01	-	dBm/°C
Recommended Operating Voltage	-	20	22	V

Test conditions unless otherwise noted: 25 °C,  $V_D = +20$  V,  $I_{DQ} = 560$  mA,  $V_G = -2.5$  V typical.







### Typical Performance – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 560\text{ mA}$ ,  $V_G = -2.5\text{ V}$  typical, CW.

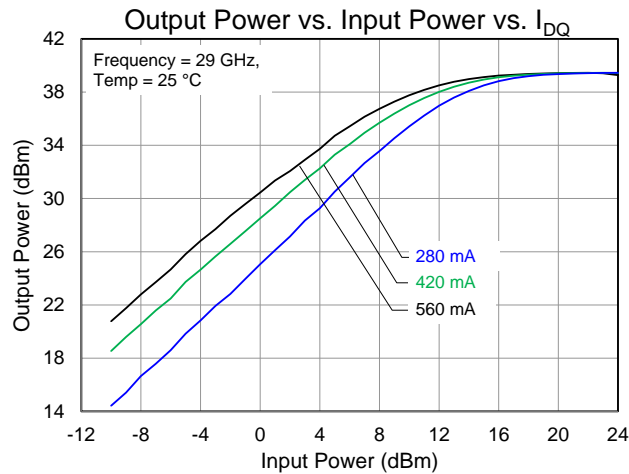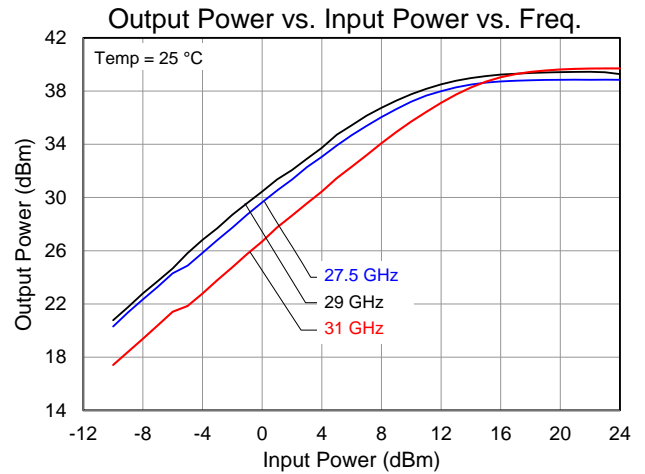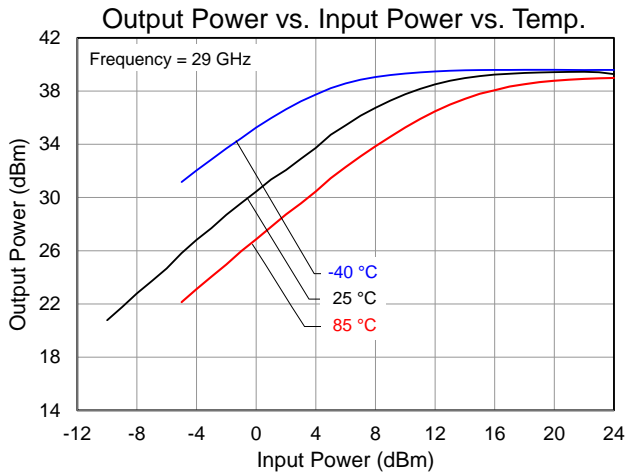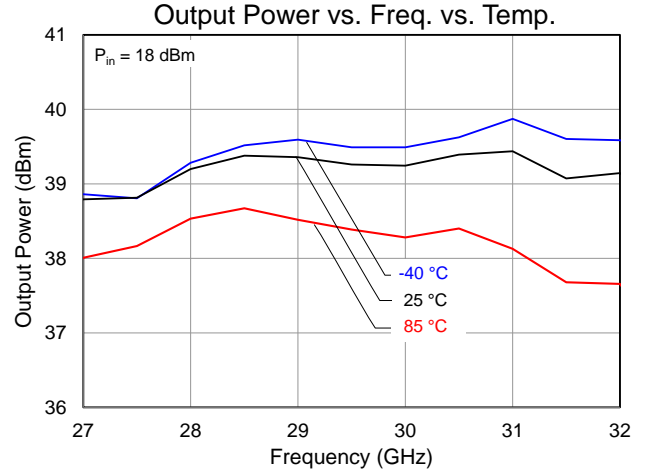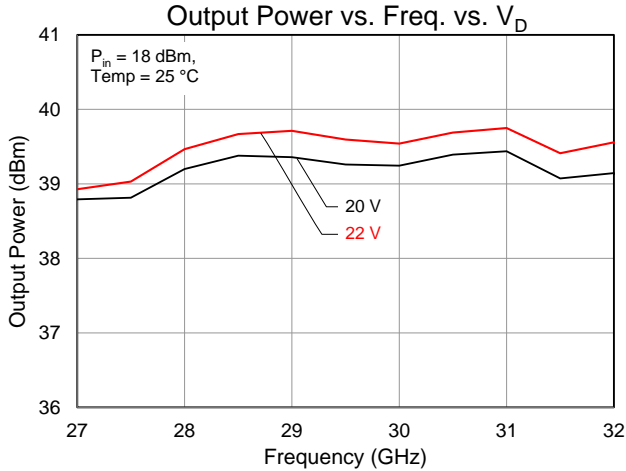







### Typical Performance – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 560\text{ mA}$ ,  $V_G = -2.5\text{ V}$  typical, CW.

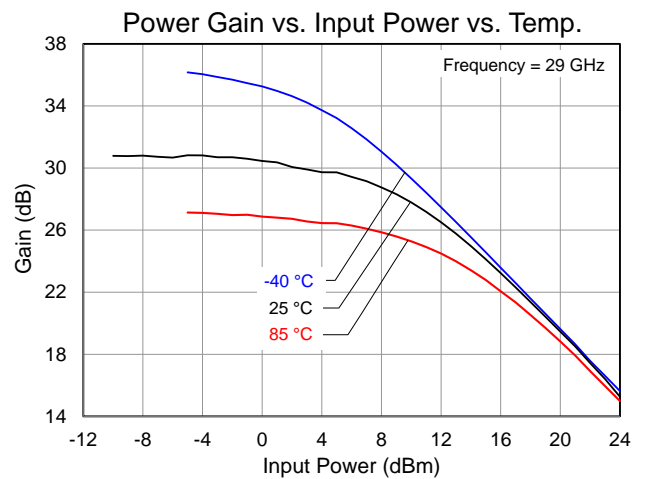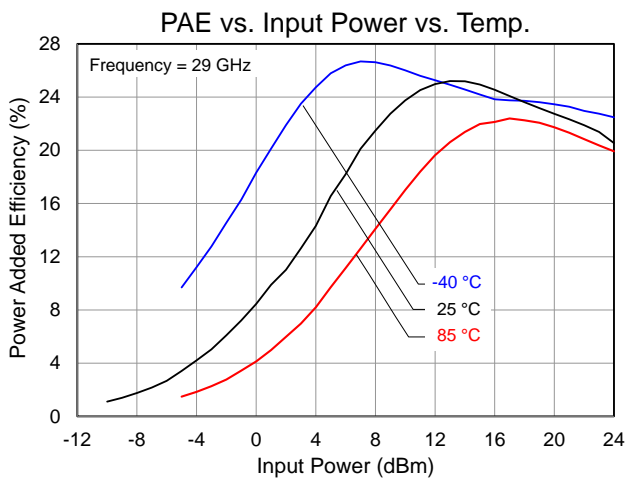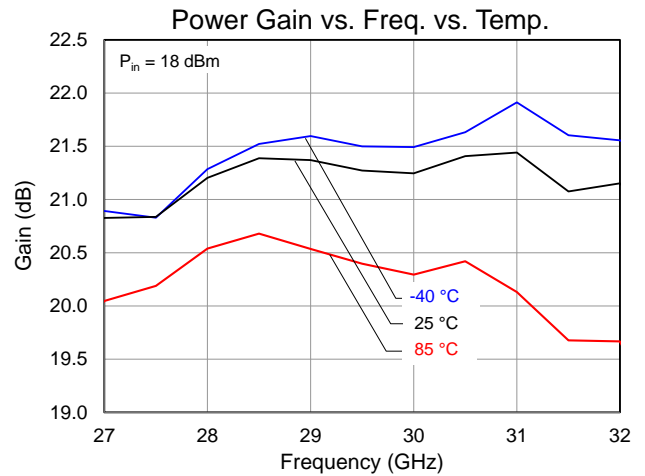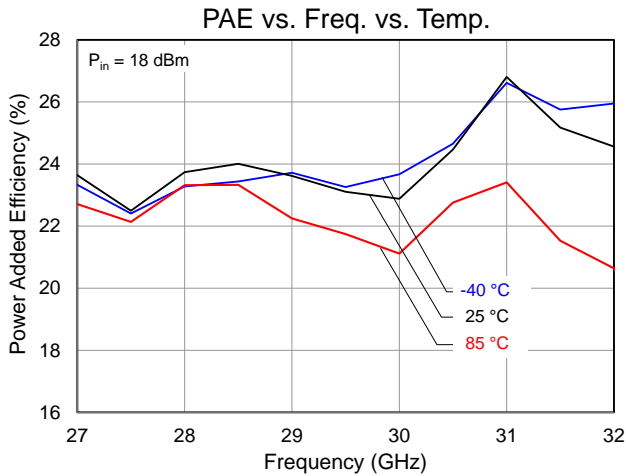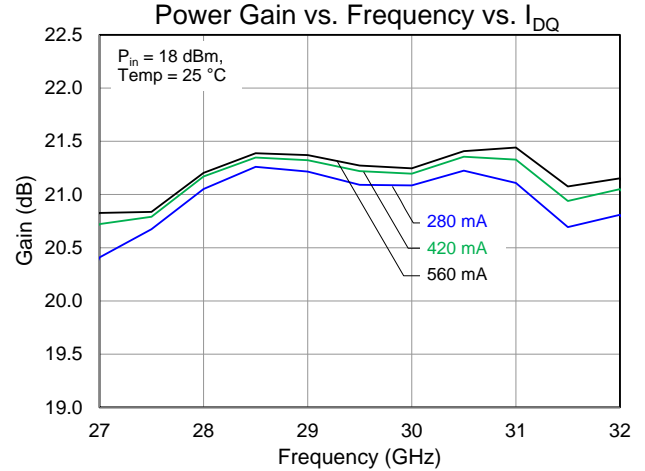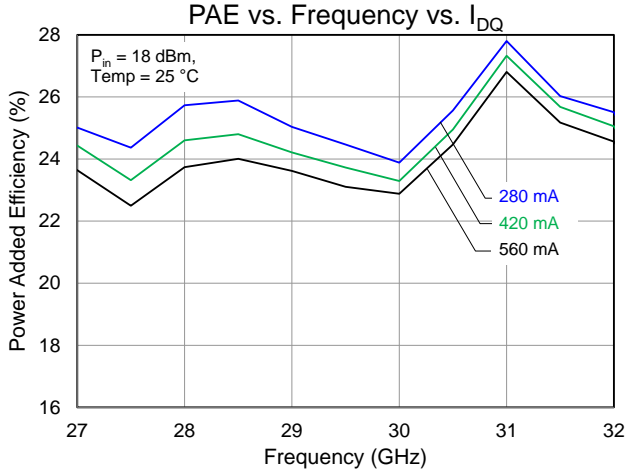







### Typical Performance – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 560\text{ mA}$ ,  $V_G = -2.5\text{ V}$  typical, CW.

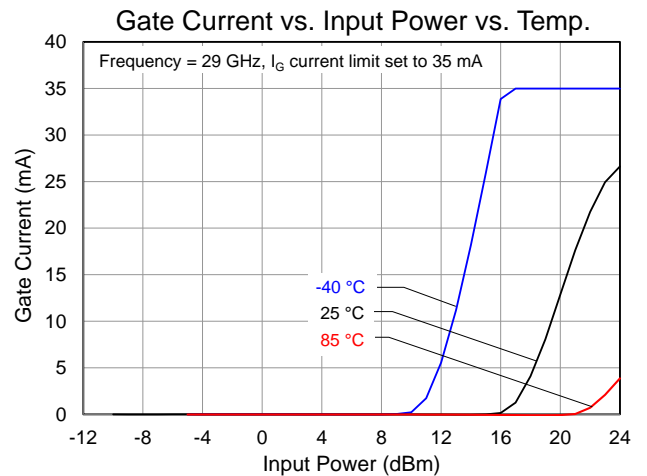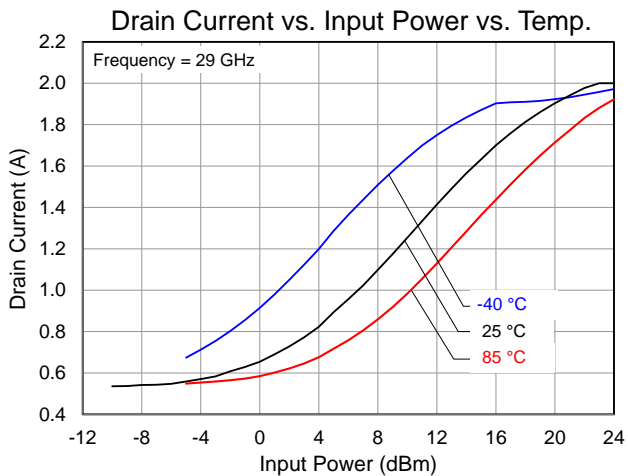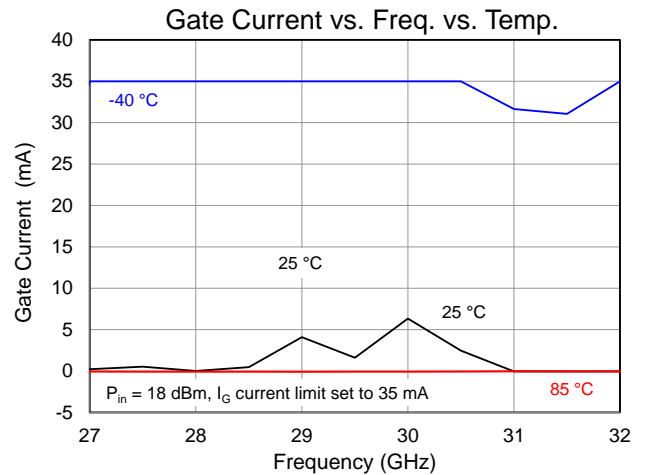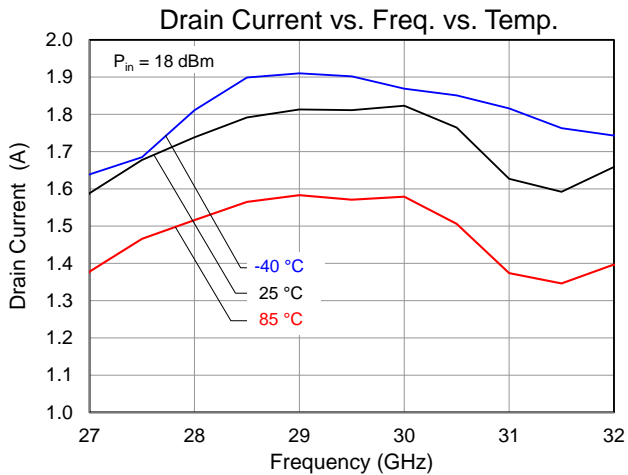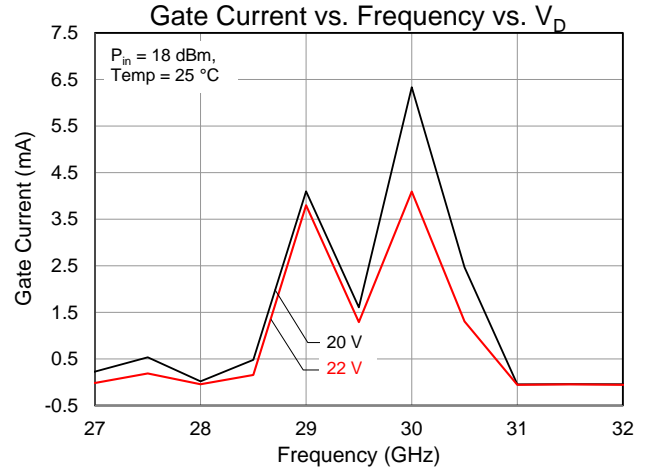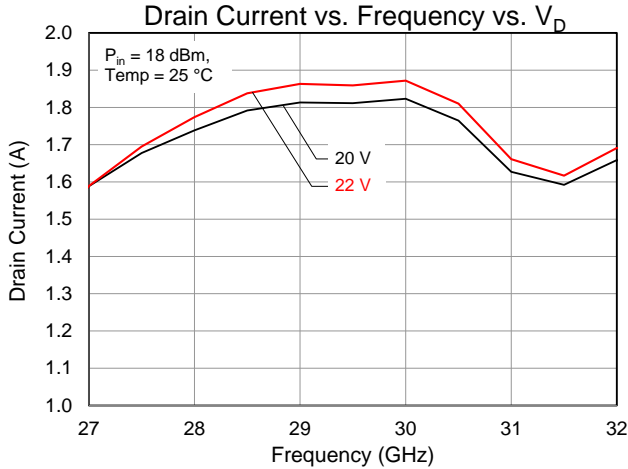







### Performance Plots – Large Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 560\text{ mA}$ ,  $V_G = -2.5\text{ V}$  typical, CW.

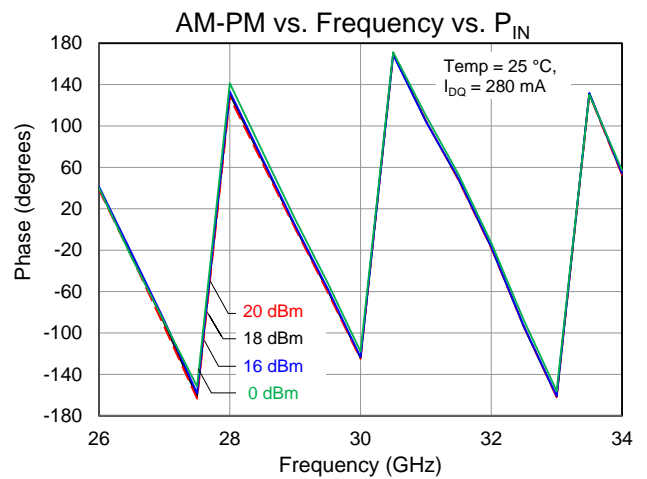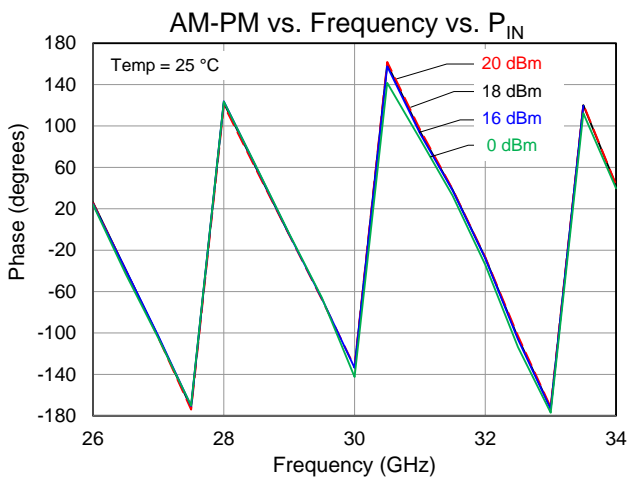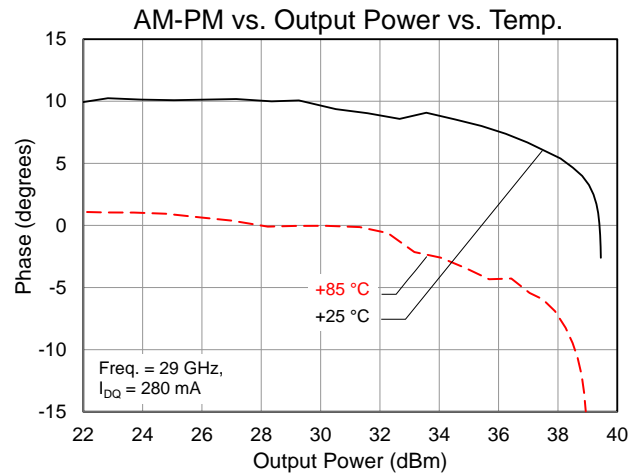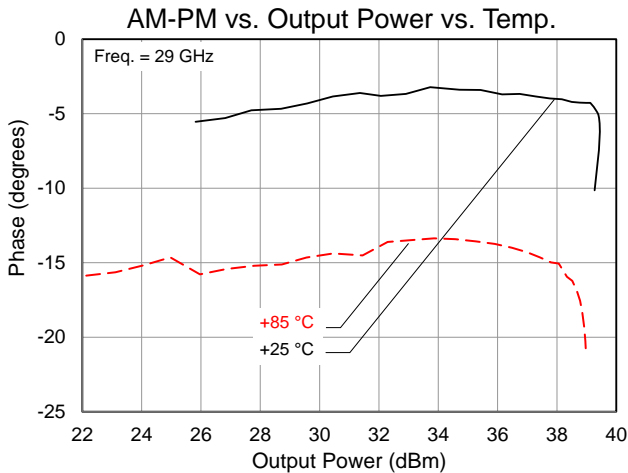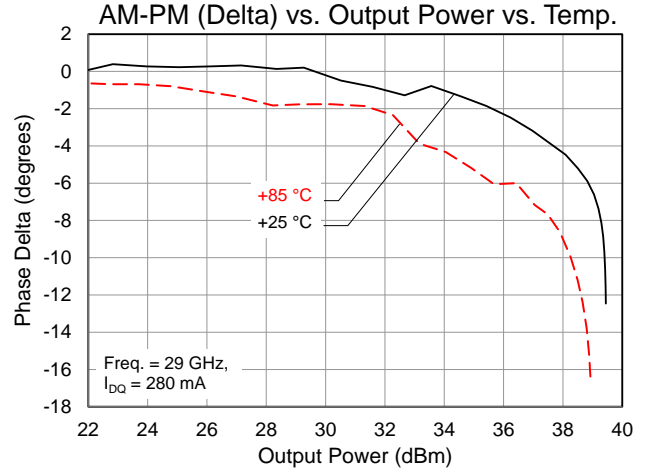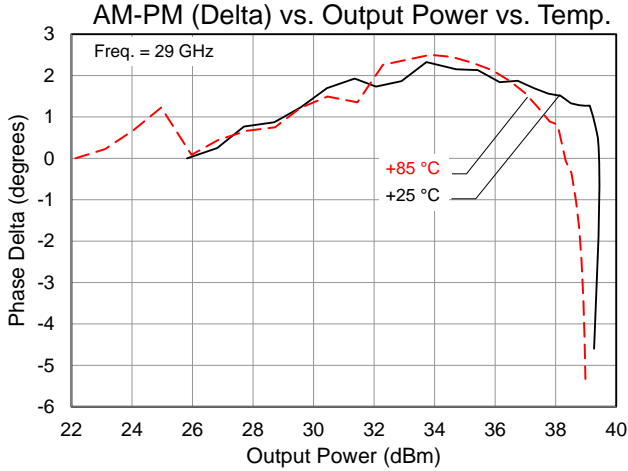







### Typical Performance – Linearity

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 560\text{ mA}$ ,  $V_G = -2.5\text{ V}$  typical, CW.

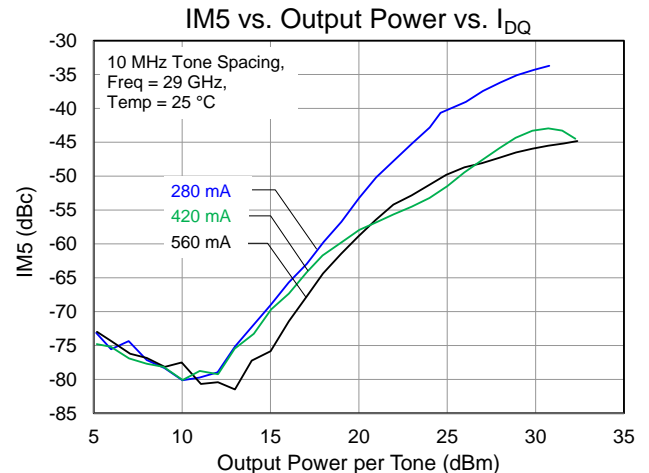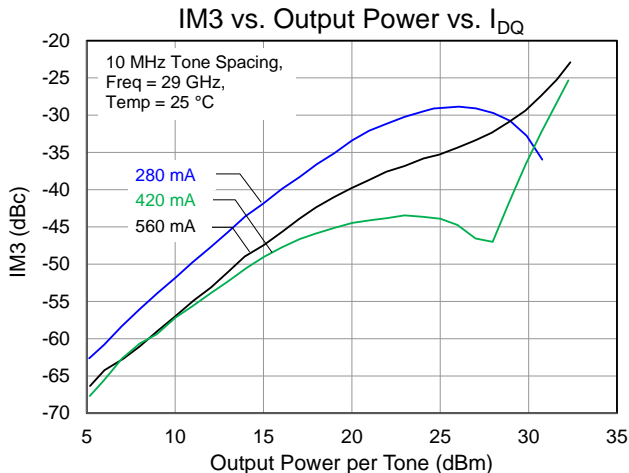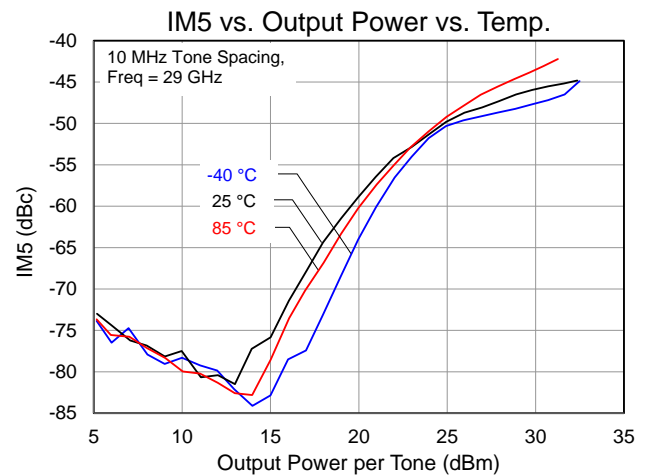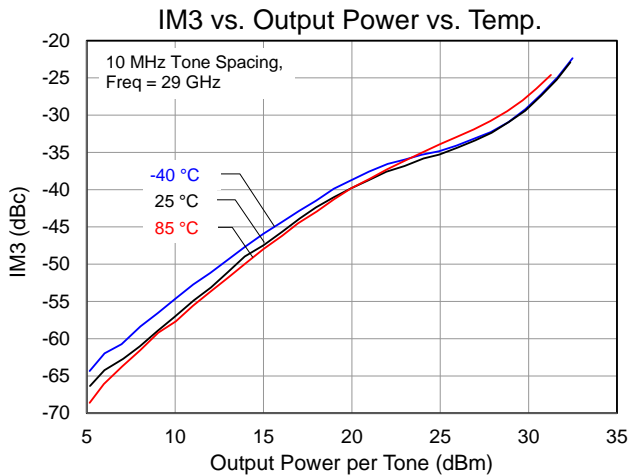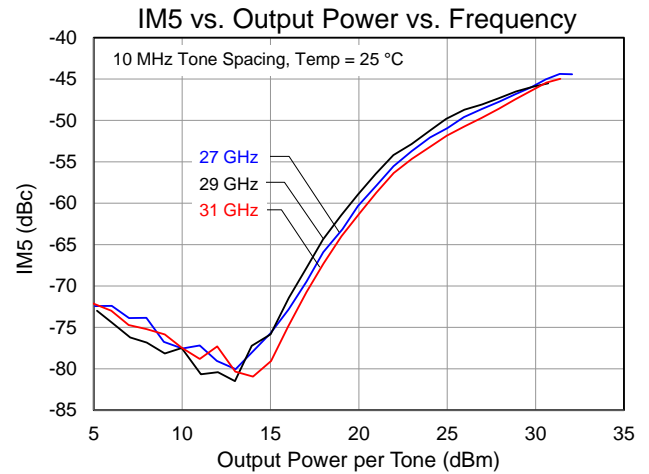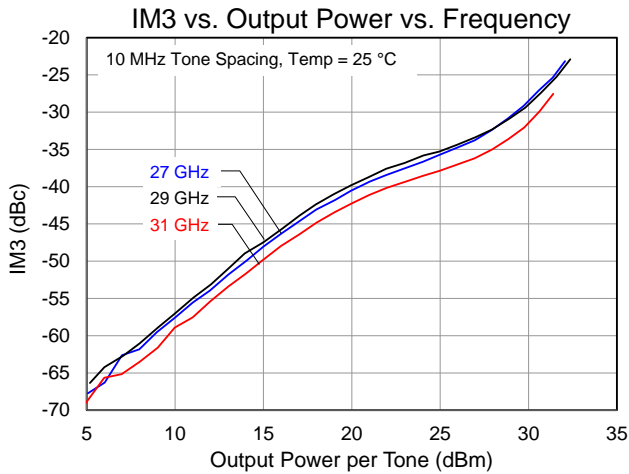

### Typical Performance – Small Signal

Conditions unless otherwise specified:  $V_D = +20\text{ V}$ ,  $I_{DQ} = 560\text{ mA}$ ,  $V_G = -2.5\text{ V}$  typical, CW.

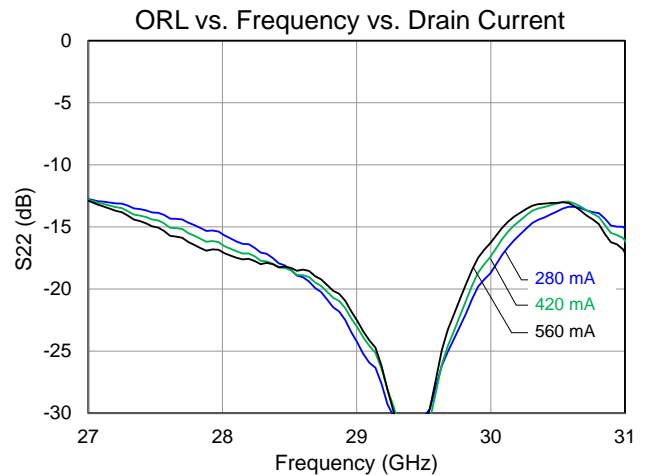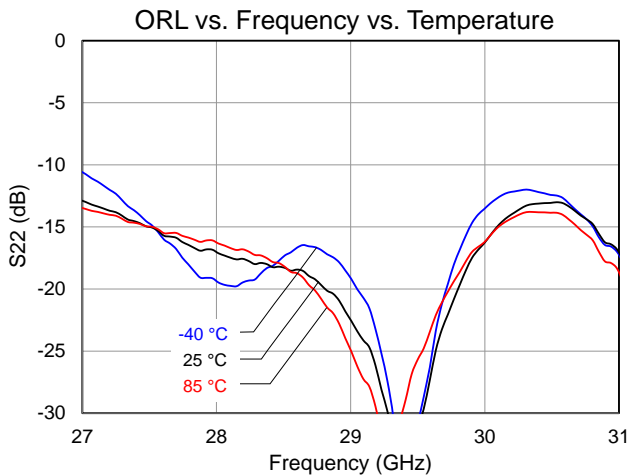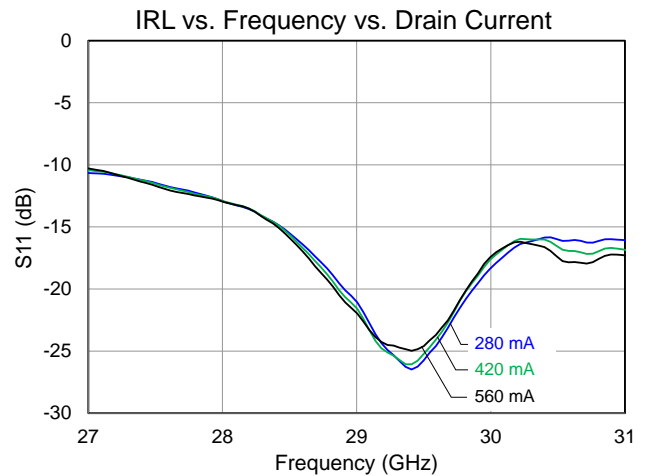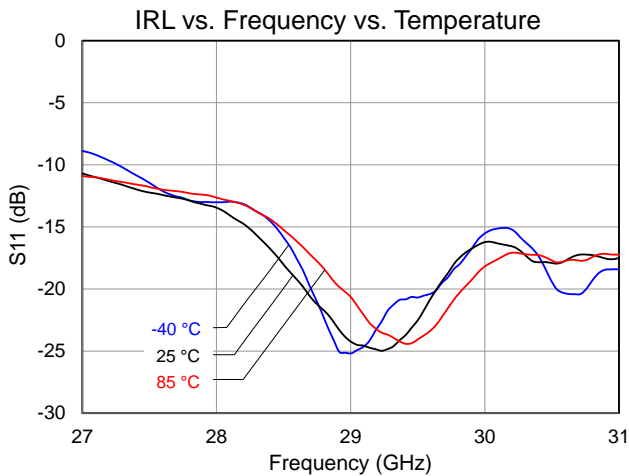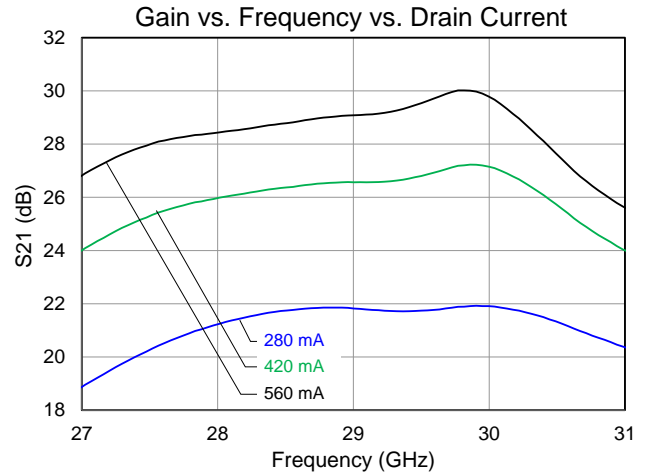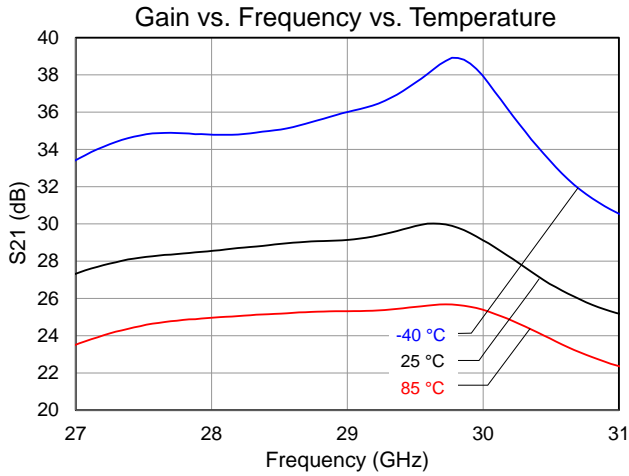






### Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	CW, $V_D = +20\text{ V}$ , $I_{DQ} = 560\text{ mA}$ ,	2.23	$^{\circ}\text{C}/\text{W}$
Channel Temperature ( $T_{CH}$ ) (Quiescent) <sup>(2)</sup>	$T_{BASE} = 85\text{ }^{\circ}\text{C}$ $P_{DISS} = 11.2\text{ W}$	110	$^{\circ}\text{C}$
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$V_D = +20\text{ V}$ , $I_{DQ} = 280\text{ mA}$ , $T_{BASE} = 85\text{ }^{\circ}\text{C}$ ,	2.40	$^{\circ}\text{C}/\text{W}$
Channel Temperature ( $T_{CH}$ ) (under RF) <sup>(2)</sup>	Freq = 30 GHz, $P_{IN} = 18\text{ dBm}$ , $P_{OUT} = 37.2\text{ dBm}$ , $P_{DISS} = 21.7\text{ W}$ , $I_{D\_Drive} = 1.38\text{ A}$	137	$^{\circ}\text{C}$
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$V_D = +20\text{ V}$ , $I_{DQ} = 560\text{ mA}$ , $T_{BASE} = 85\text{ }^{\circ}\text{C}$ ,	2.45	$^{\circ}\text{C}/\text{W}$
Channel Temperature ( $T_{CH}$ ) (RF drive) <sup>(2)</sup>	Freq = 30 GHz, $P_{IN} = 18\text{ dBm}$ , $P_{OUT} = 38.3\text{ dBm}$ , $P_{DISS} = 24.9\text{ W}$ , $I_{D\_Drive} = 1.58\text{ A}$	146	$^{\circ}\text{C}$


Notes:

1. Thermal resistance is referenced to the back of package ( $85\text{ }^{\circ}\text{C}$ )
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

### Dissipated Power and Maximum Gate Current

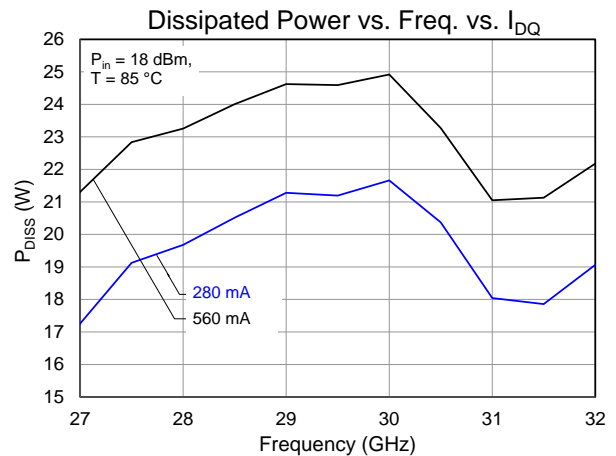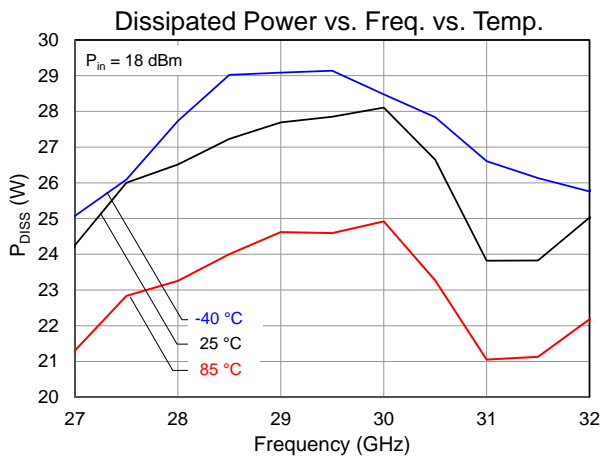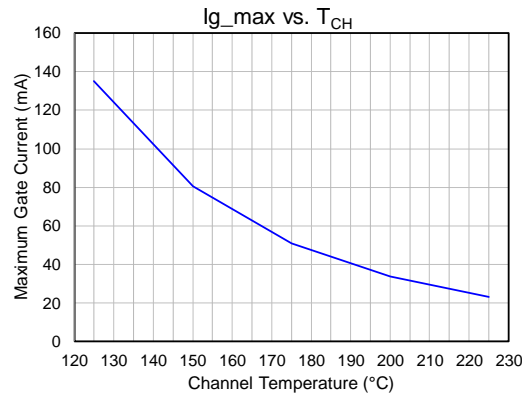

## Applications Information and Pin Layout

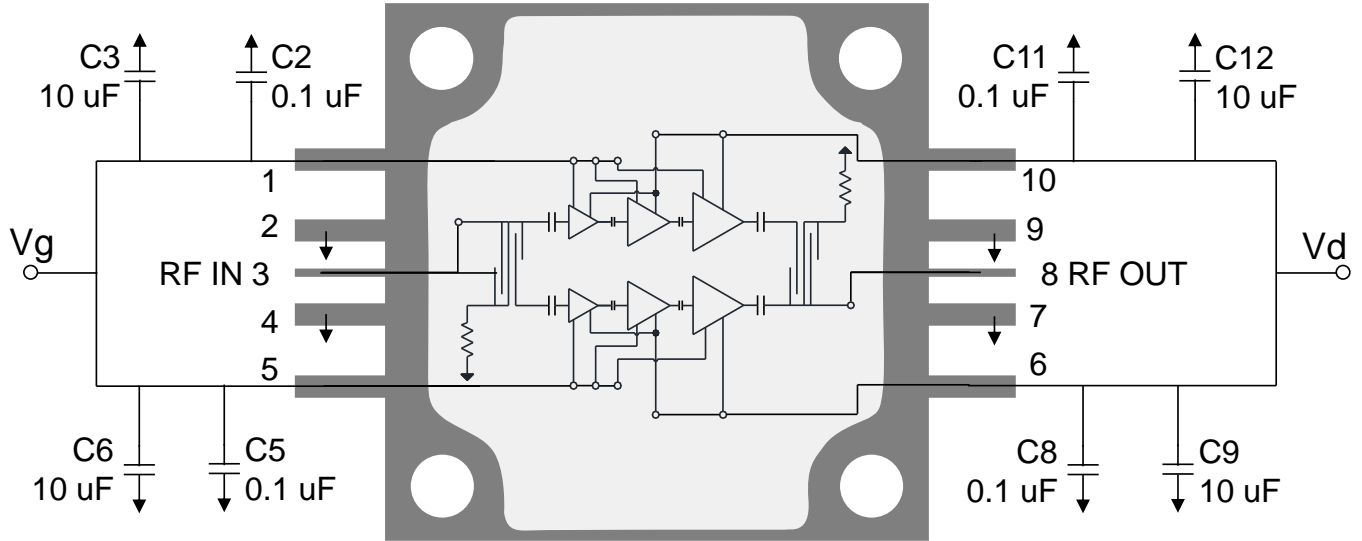

### Bias Up Procedure

1. Set  $I_D$  limit to 2 A,  $I_G$  limit to 35 mA
2. Apply  $-5\text{ V}$  to  $V_G$
3. Apply  $+20\text{ V}$  to  $V_D$ ; ensure  $I_{DQ}$  is approx. 0 mA
4. Adjust  $V_G$  until  $I_{DQ} = 560\text{ mA}$  ( $V_G \sim -2.5\text{ V Typ.}$ ).
5. Turn on RF supply


### Bias Down Procedure

1. Turn off RF supply
2. Reduce  $V_G$  to  $-5\text{ V}$ ; ensure  $I_{DQ}$  is approx. 0 mA
3. Set  $V_D$  to 0 V
4. Turn off  $V_D$  supply
5. Turn off  $V_G$  supply

### Pin Description

Pad No.	Symbol	Description
1,5	$V_G$	Gate Voltage; Bias network is required; must be biased from both sides; see recommended Application Information above.
3	$RF_{IN}$	Input; matched to $50\ \Omega$ ; DC blocked
2,4,7,9	GND	Must be grounded on the PCB.
6,10	$V_D$	Drain voltage; Bias network is required; must be biased from both sides; see recommended Application Information above.
8	$RF_{OUT}$	Output; matched to $50\ \Omega$ ; DC blocked

### Assembly Drawing

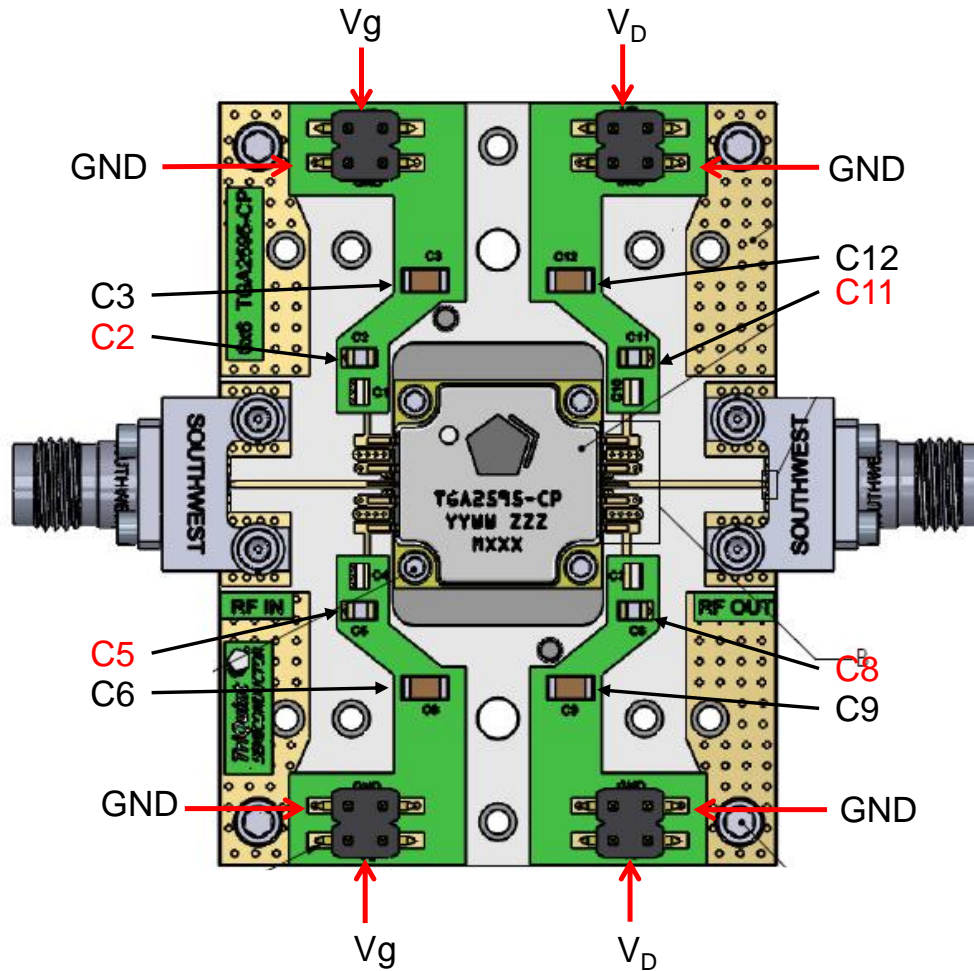

**PCB NOTES:**

- (1) Both Top and Bottom  $V_d$  and  $V_g$  must be biased.
- (2) This PCB is non-standard, and requires PCB trace modification for 30 GHz performance optimization. See Gerber files for detailed information.

### Bill of Materials

Reference Des.	Value	Description	Manuf.	Part Number
C2, C5, C8, C11	0.1 $\mu$ F	Cap, 0603, +50 V, 10 %, X7R	Various	–
C3, C6, C9, C12 <sup>(1)</sup>	10 $\mu$ F	Cap, 1206, +50 V, 20 %, X5R	Various	–


**Notes:**

- 1. Capacitors in drain path should be removed for pulsed operation.

### Assembly Notes


---

1. Carefully clean the PC board and package leads with alcohol. Allow it to dry fully.
2. To improve the thermal and RF performance, Qorvo recommends attaching a heat sink to the bottom of the PCB and apply thermal compound (Arctic Silver 5 recommended) or 4 mil indium shim between the heat sink and the package.
3. (The following is for *information only*. There are many variables in a second level assembly that Qorvo does not control, so Qorvo does not recommend an absolute torque value.) Use screws to attach the component to the heat sink. A suggested torque value is 16 in-oz. for a 0-80 screw. Start with screws finger tight, then torque to 8 in-oz., then torque to final value. Use the following tightening pattern:



4. Apply no-flux solder to each pin of the TGA2595-CP. The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. The use of no-clean solder to avoid washing after soldering is recommended.

## Mechanical Information and Marking

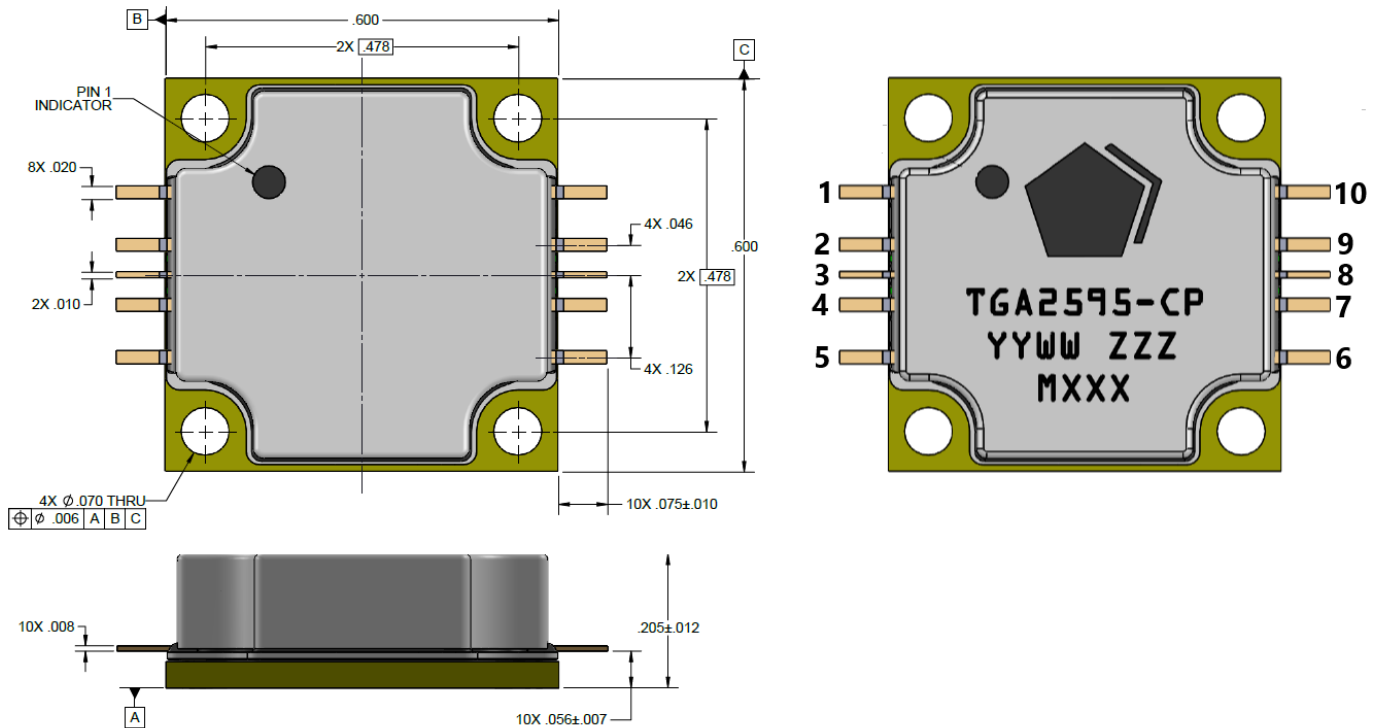

Units: inches

Tolerances unless specified:  $x.xxx = \pm 0.005$

Materials:

Base: Copper

Lead: Alloy 194

Lid: Plastic

All metalized features are gold plated

Part is epoxy sealed

Marking:

2595: Part number

YY: Part Assembly year

WW: Part Assembly week

ZZZ: Serial Number

MXXX: Batch ID

## Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1A	ANSI/ESD/JEDEC JS-001
ESD – Charge Device Model (CDM)	Class C2	JESD22-C101
MSL – Moisture Sensitivity Level	N/A	Blank, null, no content



Caution!  
ESD-Sensitive Device

## Solderability

Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C

## RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: [www.qorvo.com](http://www.qorvo.com)

Tel: 1-844-890-8163

Email: [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[TGA2595-CP](#)