

2-22GHz LNA with AGC

GaAs Monolithic Microwave IC in SMD hermetic leadless package


Description

The CHA3024-FDB is a distributed Low Noise Amplifier with Adjustable Gain Control (AGC) which operates between 2 and 22GHz.

It is designed for a wide range of applications, such as electronic warfare, X and Ku Point to Point Radio, and test instrumentation.


The circuit is manufactured with a pHEMT process, 0.15 μ m gate length, via holes through the substrate, air bridges and electron beam gate lithography.

It is supplied in RoHS compliant SMD package.

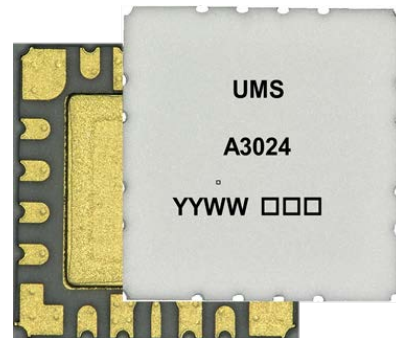

Main Features

- Broadband performances: 2-22GHz
- Typical Linear Gain : 15dB
- Up to 30dB adjustable gain with V_{G2}
- $P_{1dB}=18dBm$
- $P_{SAT}=22dBm$
- Typical Noise Figure $NF=3dB$
- DC bias : $V_D=5V@I_D=100mA$, $V_{G1}=-0.3V$ and $V_{G2}=1.7V$

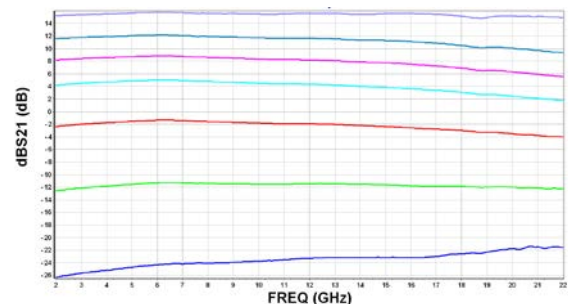

Main Electrical Characteristics

$T_{amb.} = +25^{\circ}C$ $V_D = +5V$ $V_{G2} = 1.7V$ V_{G1} set to have $I_{DQ} = 100mA$

Symbol	Parameter	Min	Typ	Max	Unit
Freq	Frequency range	2		22	GHz
Gain	Linear Gain		15		dB
NF	Noise Figure		3		dB
Pout	Output Power @1dB comp.		18		dBm

Specifications

Tamb.= +25°C V_D=+5V V_{G2}=1.7V V_{G1} set to have I_{DQ}=100mA

Symbol	Parameter	Min	Typ	Max	Unit
Freq	Frequency range	2		22	GHz
Gain	Linear Gain	14	15		dB
ΔG	Gain control		30		dB
NF	Noise Figure		3		dB
IRL	Input Return Loss		10		dB
ORL	Output Return Loss		10		dB
P _{1dB}	Output power for 1dB Gain Compression		18		dBm
P _{sat}	Saturated output power		22		dBm
I _{DQ}	Quiescent current on Vd		100		mA
V _D	Supply voltage on Vd	4.5	5	5.5	V
I _D	Drain current @3dB gain compression		125		mA

Absolute Maximum Ratings ⁽¹⁾

Tamb.= +25°C

Symbol	Parameter	Values	Unit
V _D	Drain bias voltage	7V	V
I _{DQ}	Drain bias current	190	mA
V _{G1}	Gate bias voltage	-2 to 0	V
V _{G2}	Gate bias voltage (AGC)	-2 to 2	V
P _{IN}	Maximum CW input power overdrive	15	dBm

⁽¹⁾ Operation of this device above anyone of these parameters may cause permanent damage.

Recommended Operating Range ⁽²⁾ ⁽³⁾

Tamb = +25°C

Symbol	Parameter	Values	Unit
V _D	Drain bias voltage	5.5	V
I _{DQ}	Drain bias current	150	mA
V _{G1}	Gate bias voltage	-1.5 to -0.2	V
V _{G2}	Gate bias voltage (AGC)	-1 to 1.7	V
P _{IN}	Maximum CW input power overdrive	12	dBm

⁽²⁾ Electrical performances are defined for specified test conditions

⁽³⁾ Electrical performances are not guaranteed over all recommended operating conditions

Temperature Range

Ta	Operating temperature range	-40 to +85	°C
Tstg	Storage temperature range	-55 to +150	°C

Typical Bias Conditions

Tamb.= +25°C

Symbol	Pad N°	Parameter	Values	Unit
V _{G1}	5	Maximum Gain	-0.3	V
V _{G2}	18	Mean value to reach I _{DQ} =100mA	1.7	V
V _D	14	Drain bias voltage	5	V

Device thermal performances


The temperature is monitored at the package back-side interface (Tcase).

The system maximum temperature must be adjusted in order to guarantee that Tjunction remains below the maximum value specified in the Absolute Maximum Ratings table.

So, the system PCB must be designed to comply with this requirement.

Parameter	Biasing conditions	Tjunction (°C)	R _{TH} (°C/W)	T50 (hours)
R _{TH} ⁽¹⁾ Thermal Resistance (Junction to Case)	V _D =5V I _D =100mA P _{DISS} =0.5W	145	40	3E+07

¹ Assuming 85°C Tcase

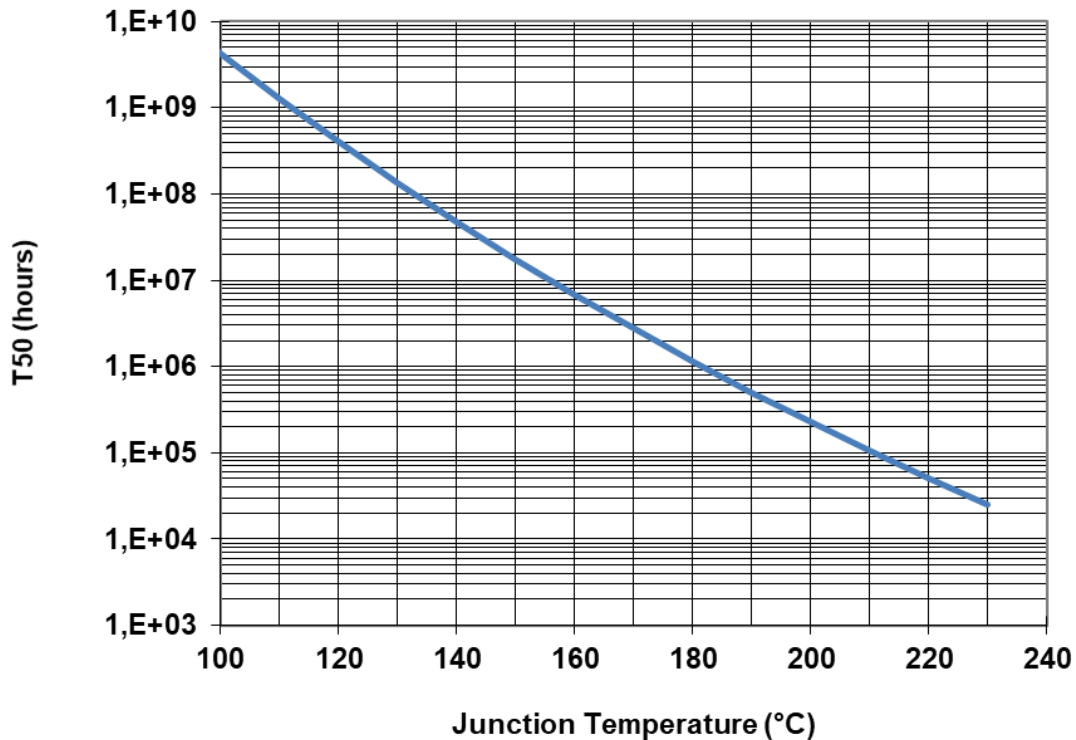


Typical Board Measurements


Tamb.= +25°C $V_D=+5V$ $V_{G2}=1.7V$ V_{G1} set to have $I_{DQ} = 100mA$

Measurements in the package access planes

Linear Gain versus Frequency

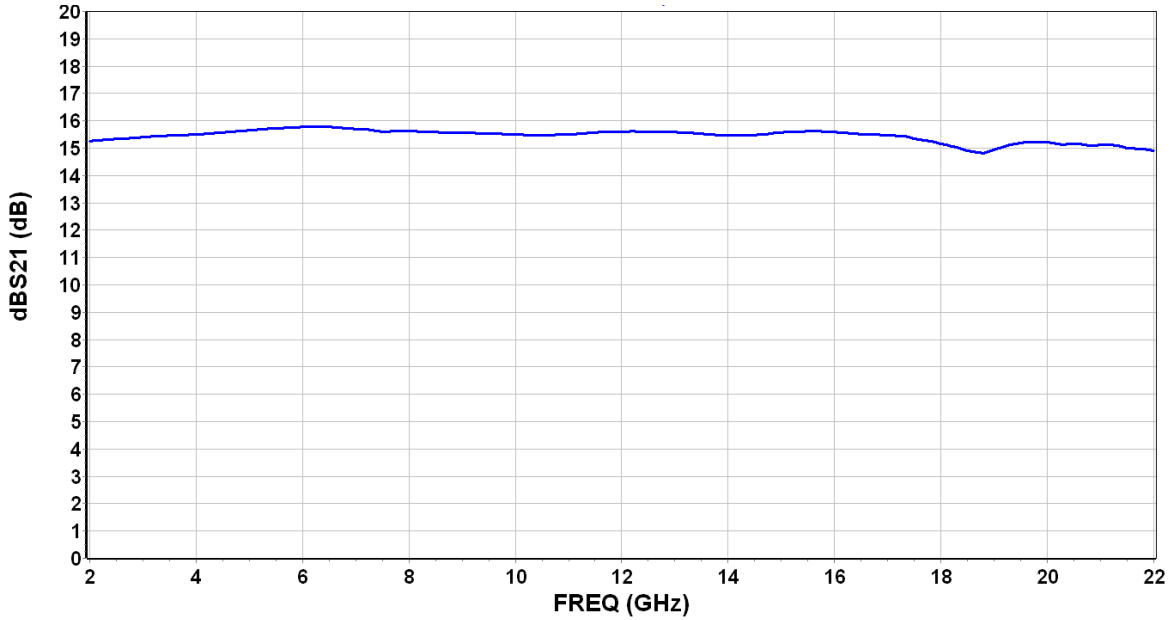


Return Loss Versus Frequency

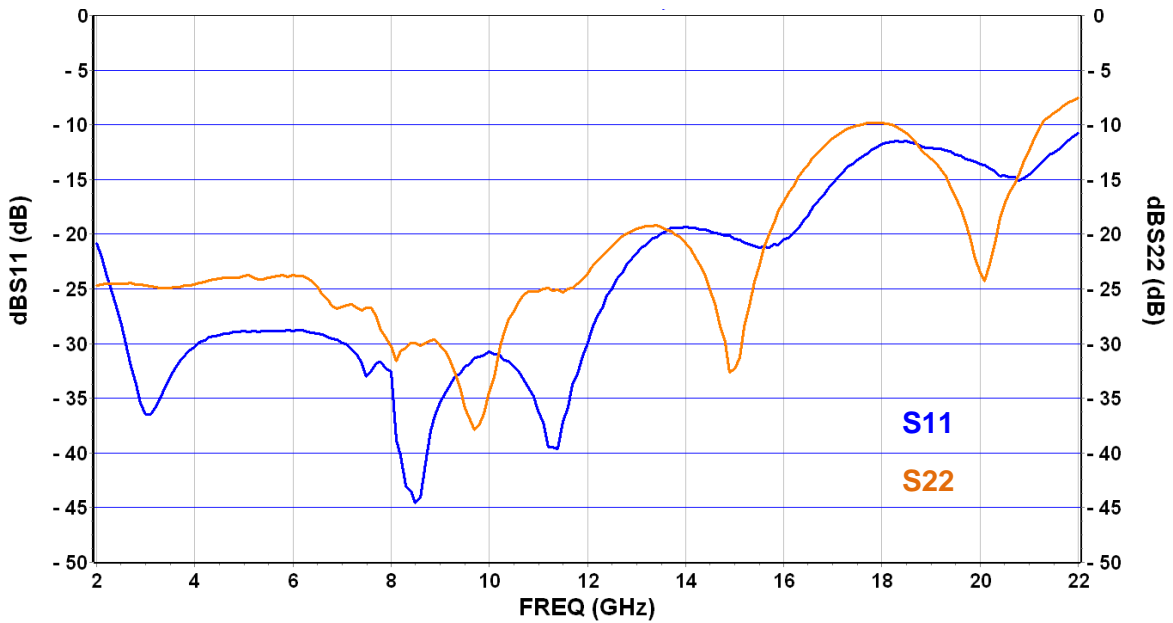


Typical Board Measurements

Tamb.= +25°C V_D=+5V V_{G2}=1.7V V_{G1} set to have I_{DQ} =100mA
 Measurements in the package access planes

Noise Figure versus Frequency

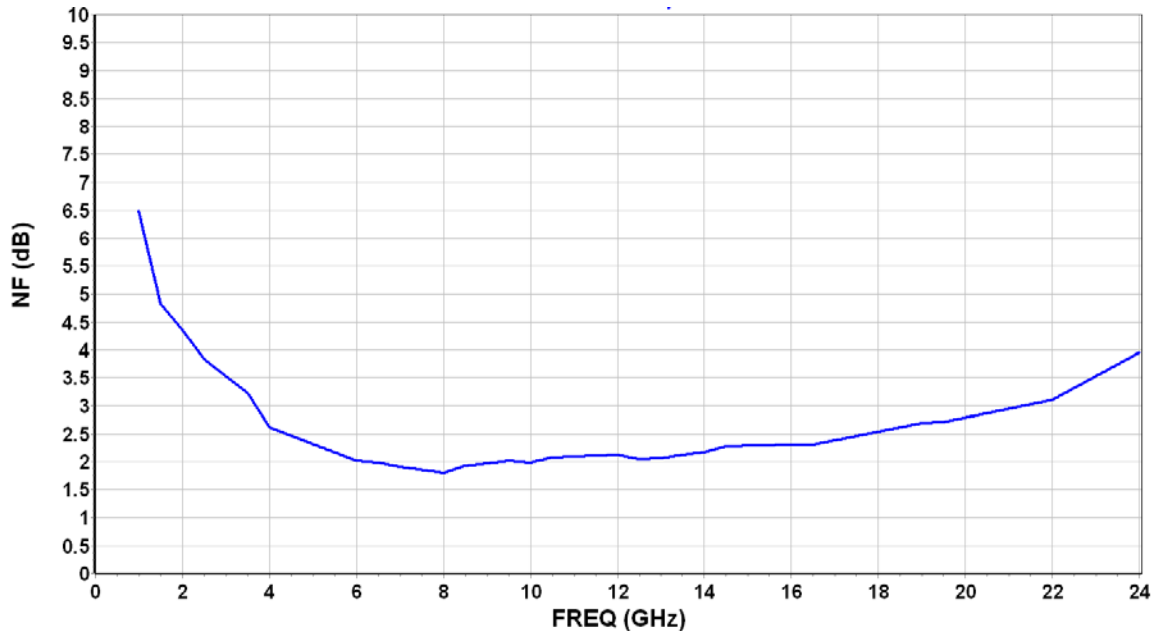

Gain tuning with VG2 at VD=+5V and IDQ=100mA

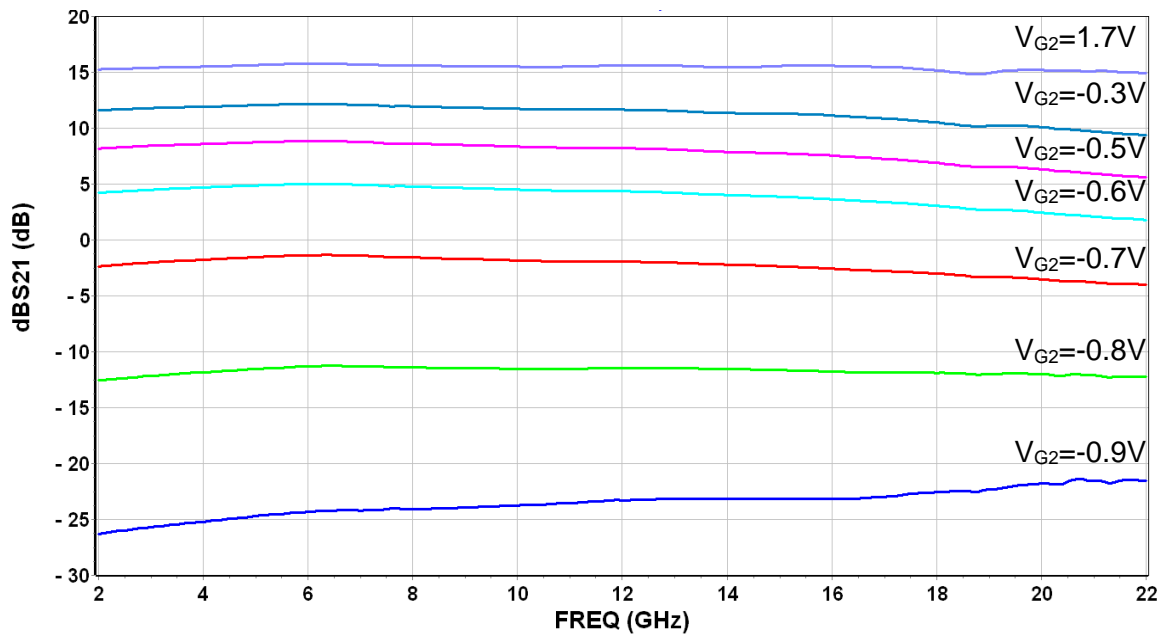


Typical Board Measurements


Tamb.= +25°C $V_D=+5V$ $V_{G2}=1.7V$ V_{G1} set to have $I_{DQ} = 100mA$

Measurements in the package access planes

Linear gain versus V_{G2} control voltage @freq=10GHz

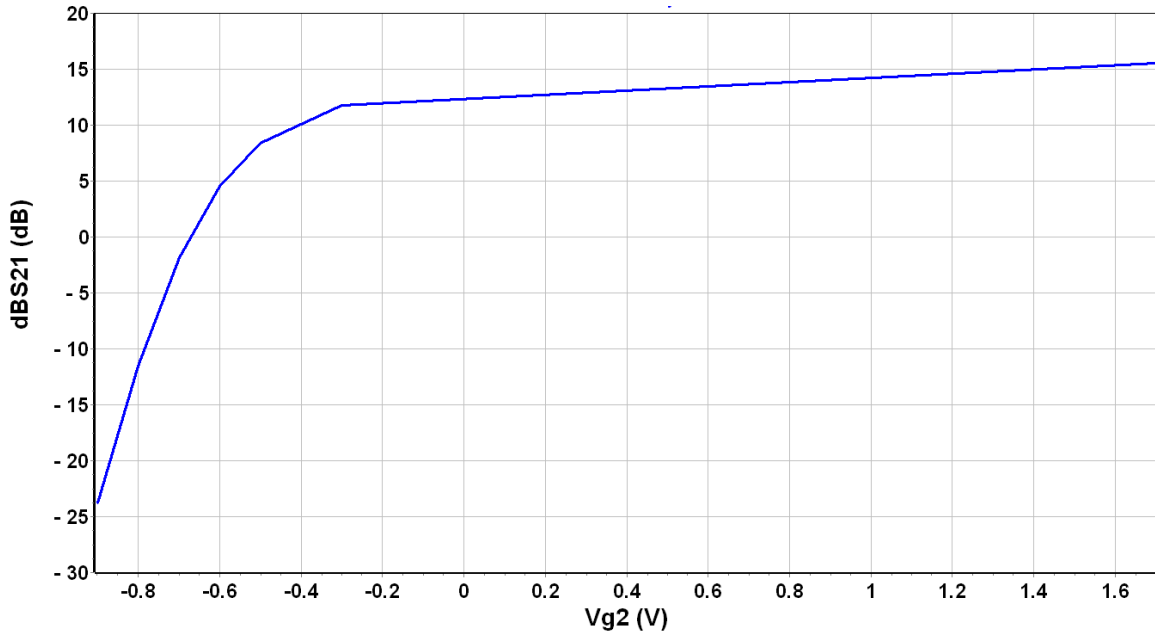


P_{out} compression level versus Frequency

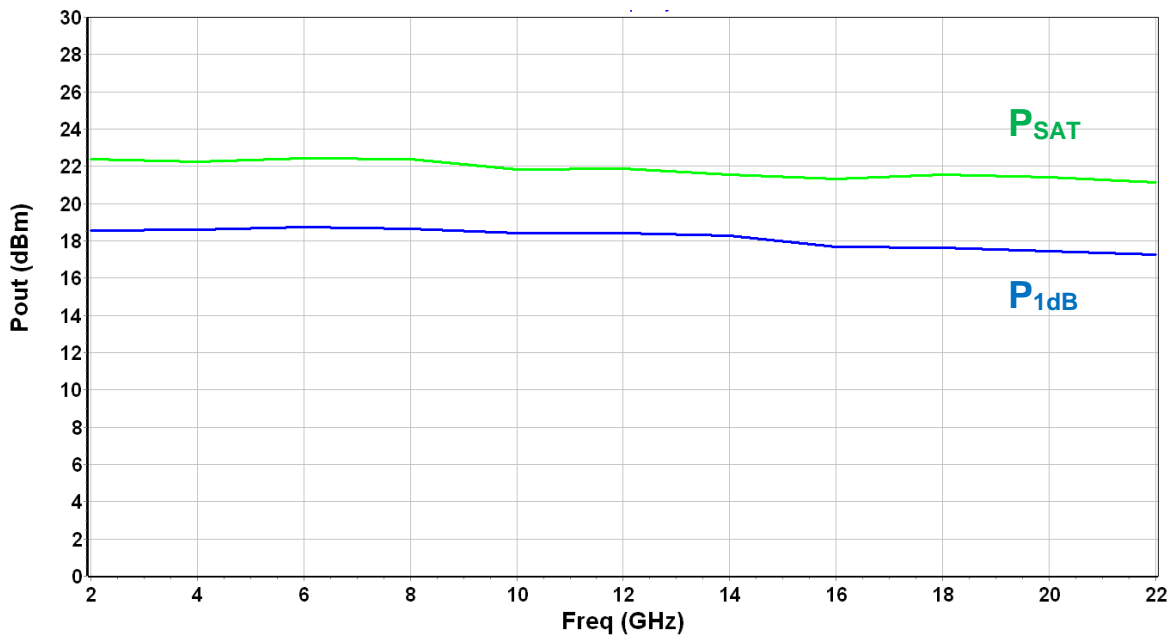


Typical Board Measurements

Tamb.= -40 / +25 / +85°C V_D=+5V V_{G2}=1.7V V_{G1} set to have I_{DQ} =100mA
 Measurements in the Board access planes

Linear Gain versus Frequency

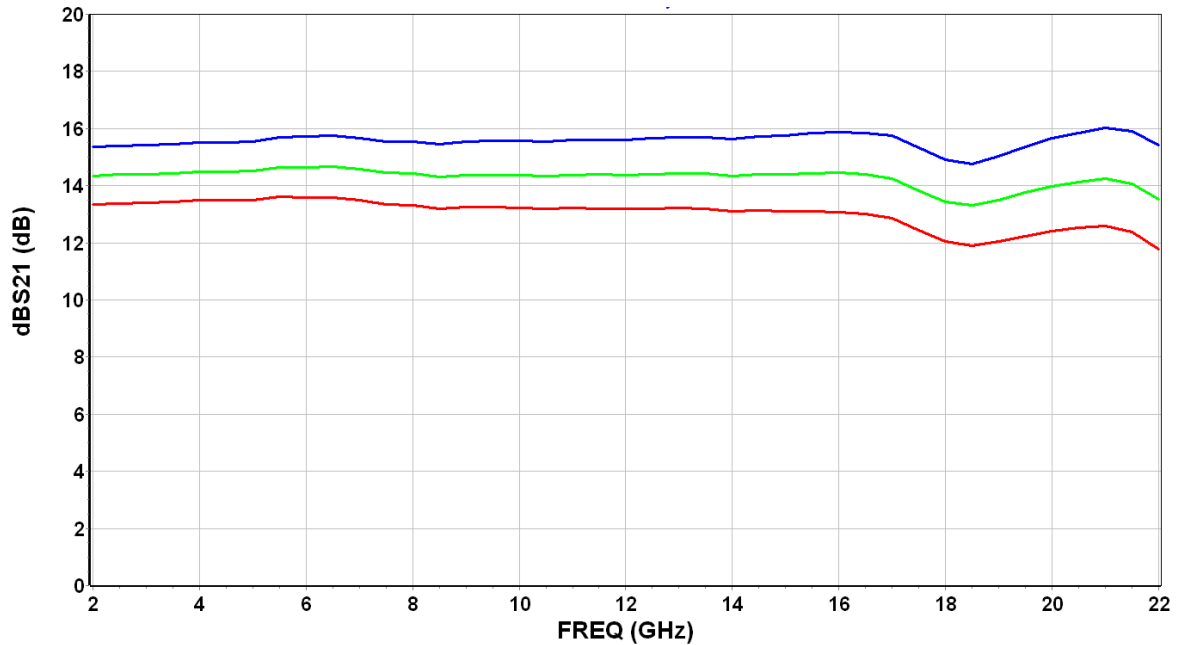


Noise Figure versus Frequency

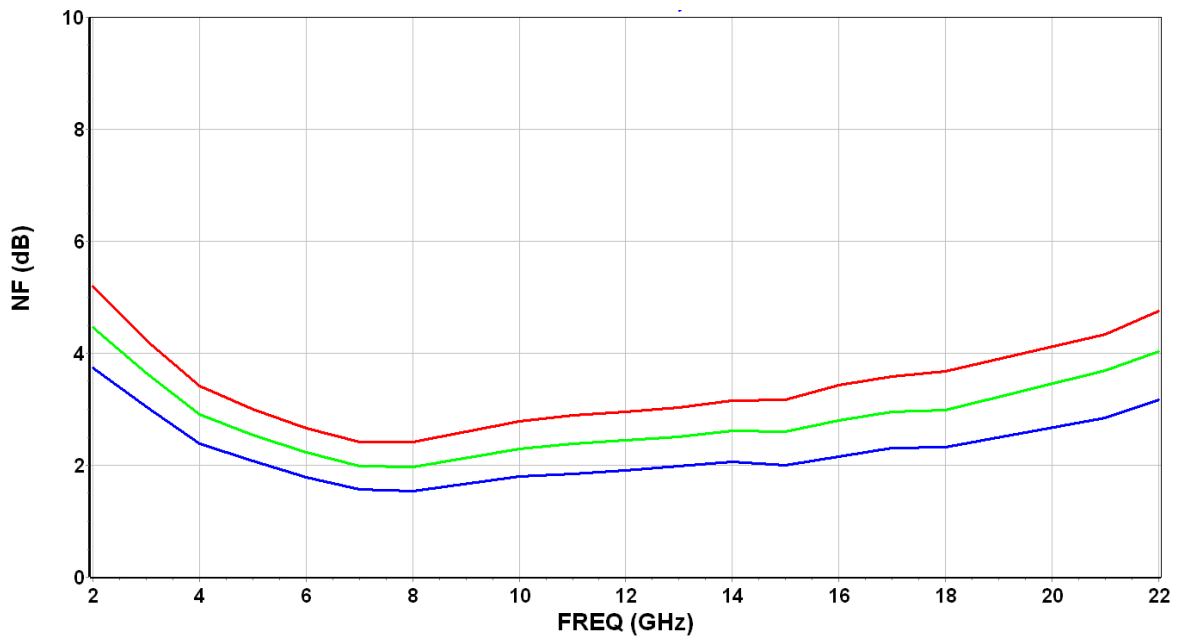


Typical Board Measurements

Tamb.= -40 / +25 / +85°C V_D=+5V V_{G2}=1.7V V_{G1} set to have I_{DQ} =100mA
 Measurements in the Board access planes


Output power at 1dBc versus frequency

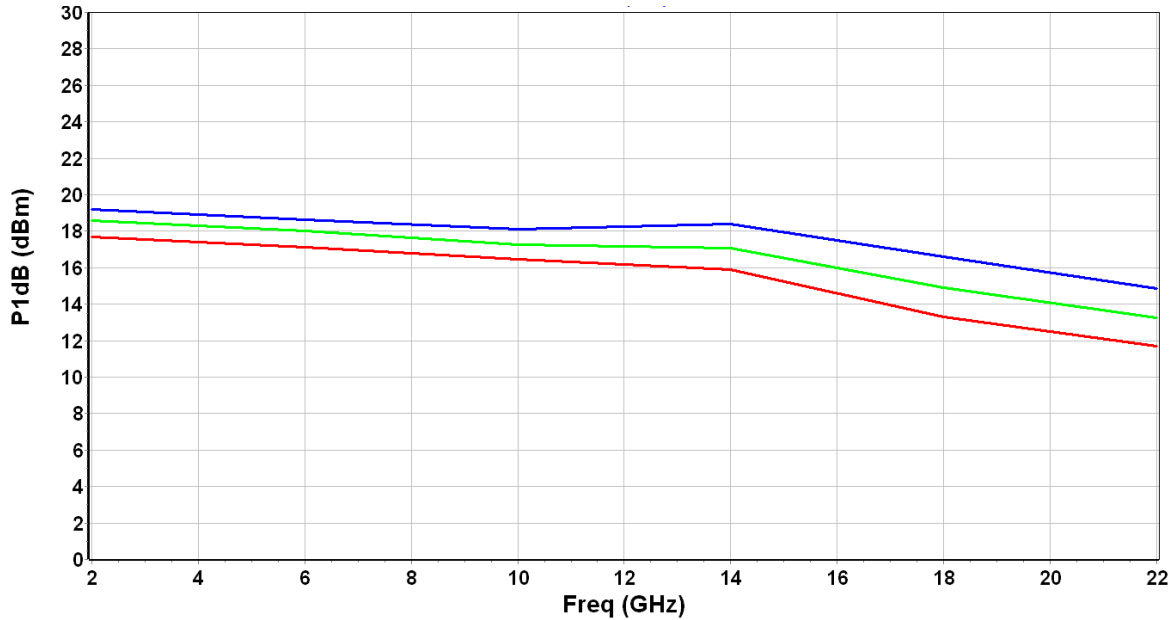

Output power versus Input power @freq=10GHz

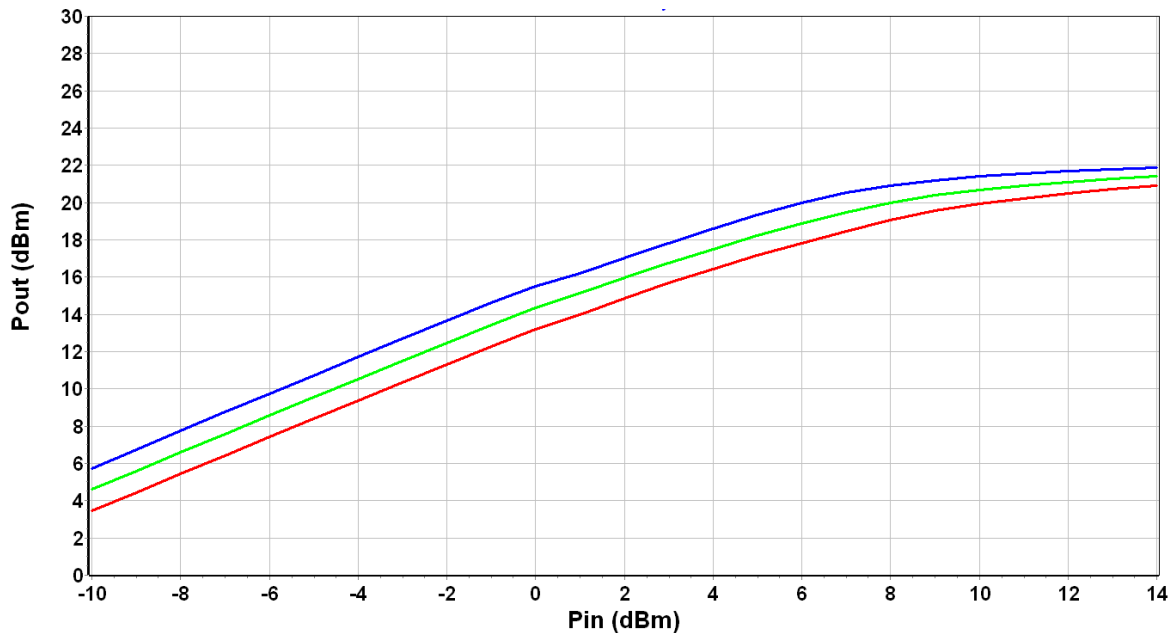

Package outline (1)

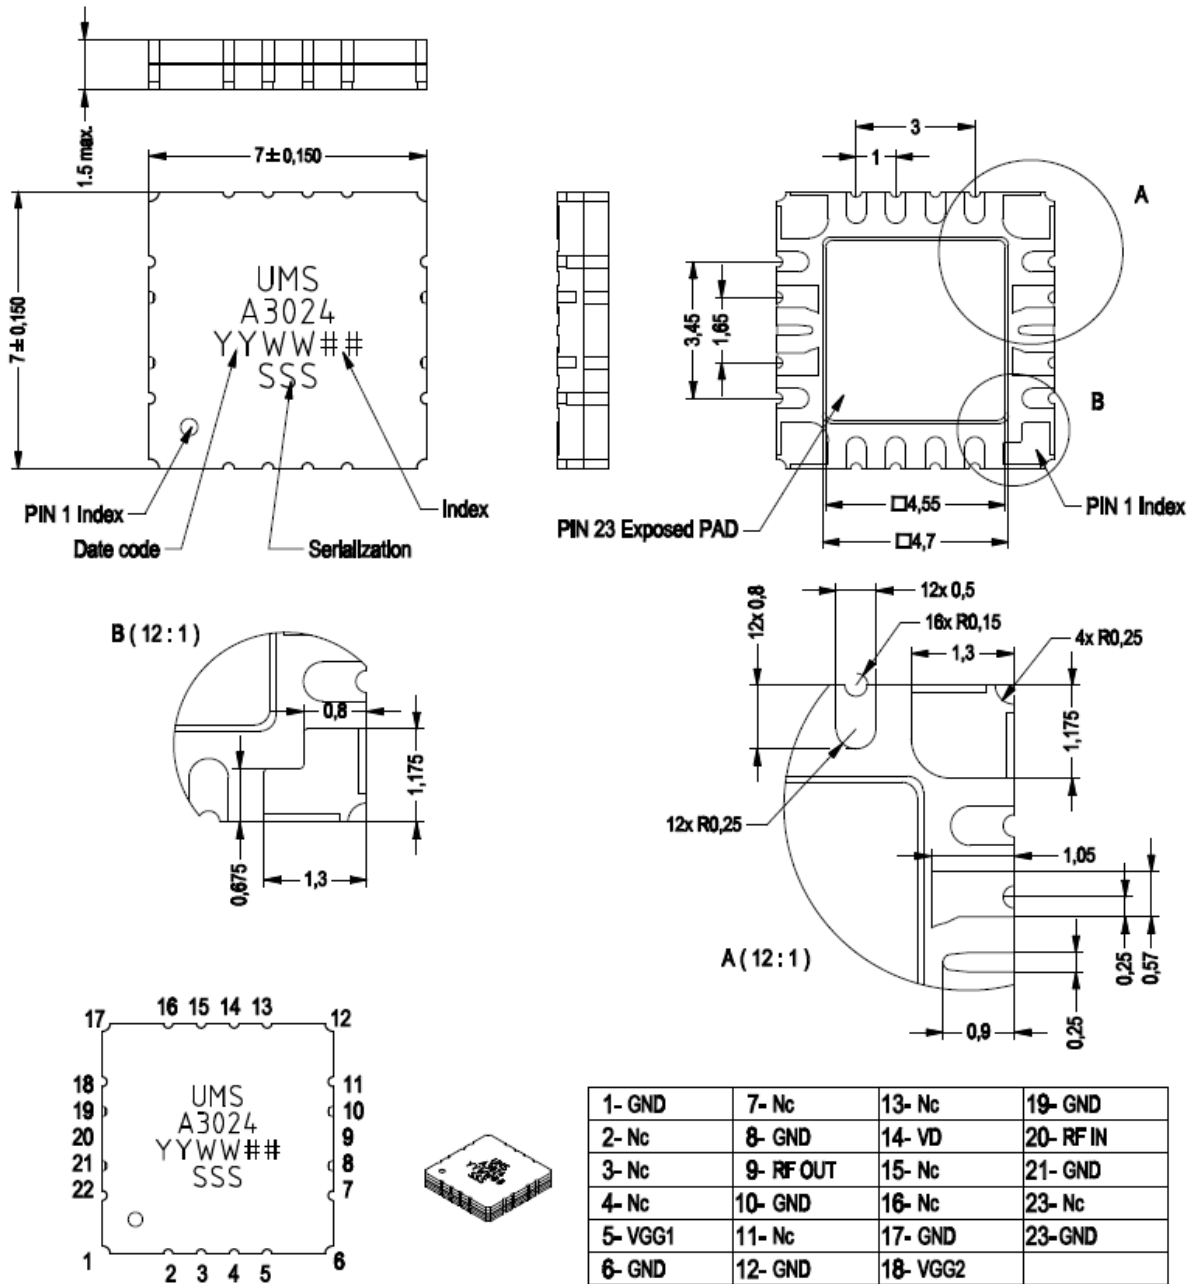


(1) The package outline drawing included to this data-sheet is given for indication. Refer to the application note AN0029 (<https://www.ums-rf.com>) for exact package dimensions.

It is strongly recommended to ground all pins marked "Nc" through the PCB board. Ensure that the PCB board is designed to provide the best possible ground to the package.

Definition of the Sij reference planes


The reference planes used for Sij measurements given above are symmetrical from the symmetrical axis of the package (see drawing beside). The input and output reference planes are located at 3.89mm offset (input wise and output wise respectively) from this axis. Then, the given Sij parameters incorporate the land pattern of the evaluation motherboard recommended in paragraph "Evaluation mother board".

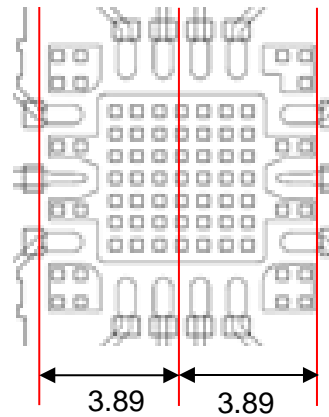

Package Information


Parameter	Value
Package body material	RoHS-compliant
Lead finish	Gold
Hermetic sealing (fine leak compliant Mil-Std-883 Method 1014.10 Condition A4, tracer gas He at 1atm)	1×10^{-8} ccHe/s/atm

Recommended assembly plan

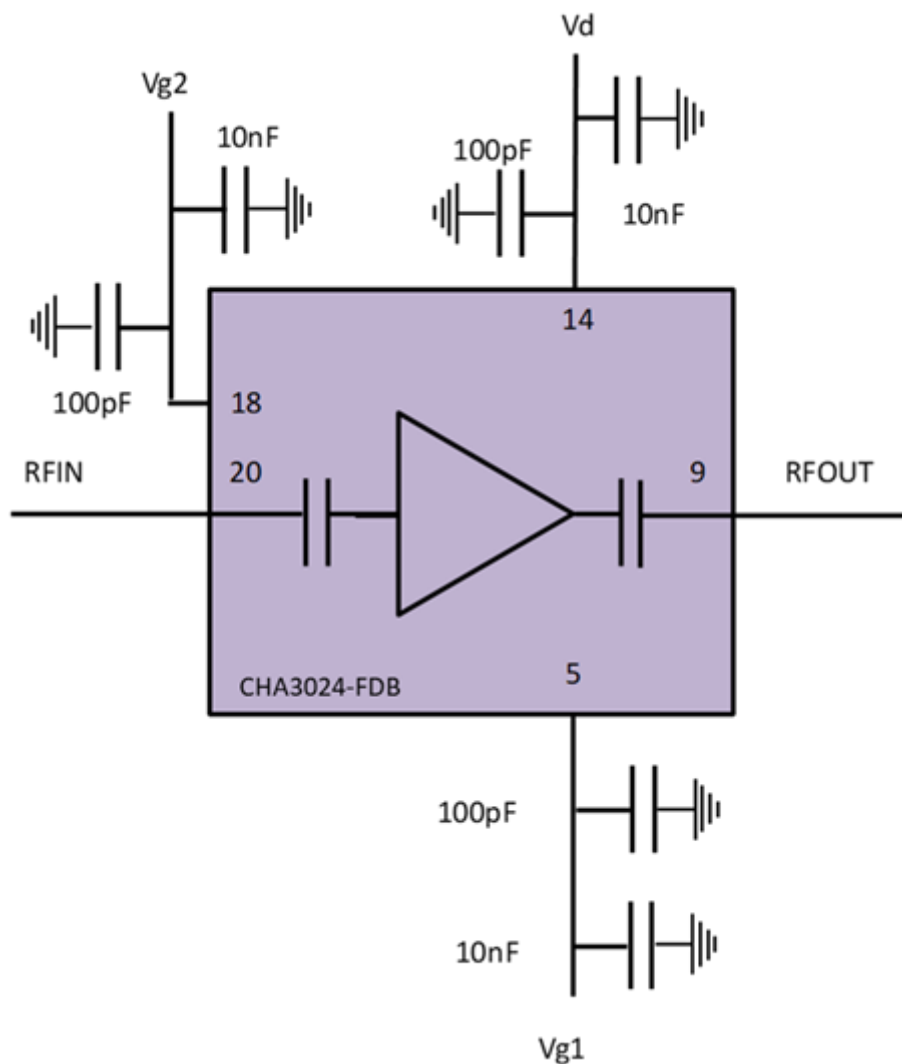


Evaluation mother board

- Compatible with the proposed footprint.
- Based on typically Ro4003 / 8mils or equivalent.
- Using a micro-strip to coplanar transition to access the package.
- Recommended for the implementation of this product on a module board.
- Decoupling capacitors of 10nF $\pm 10\%$ are recommended for all DC accesses.
- See application note AN0017 for details.

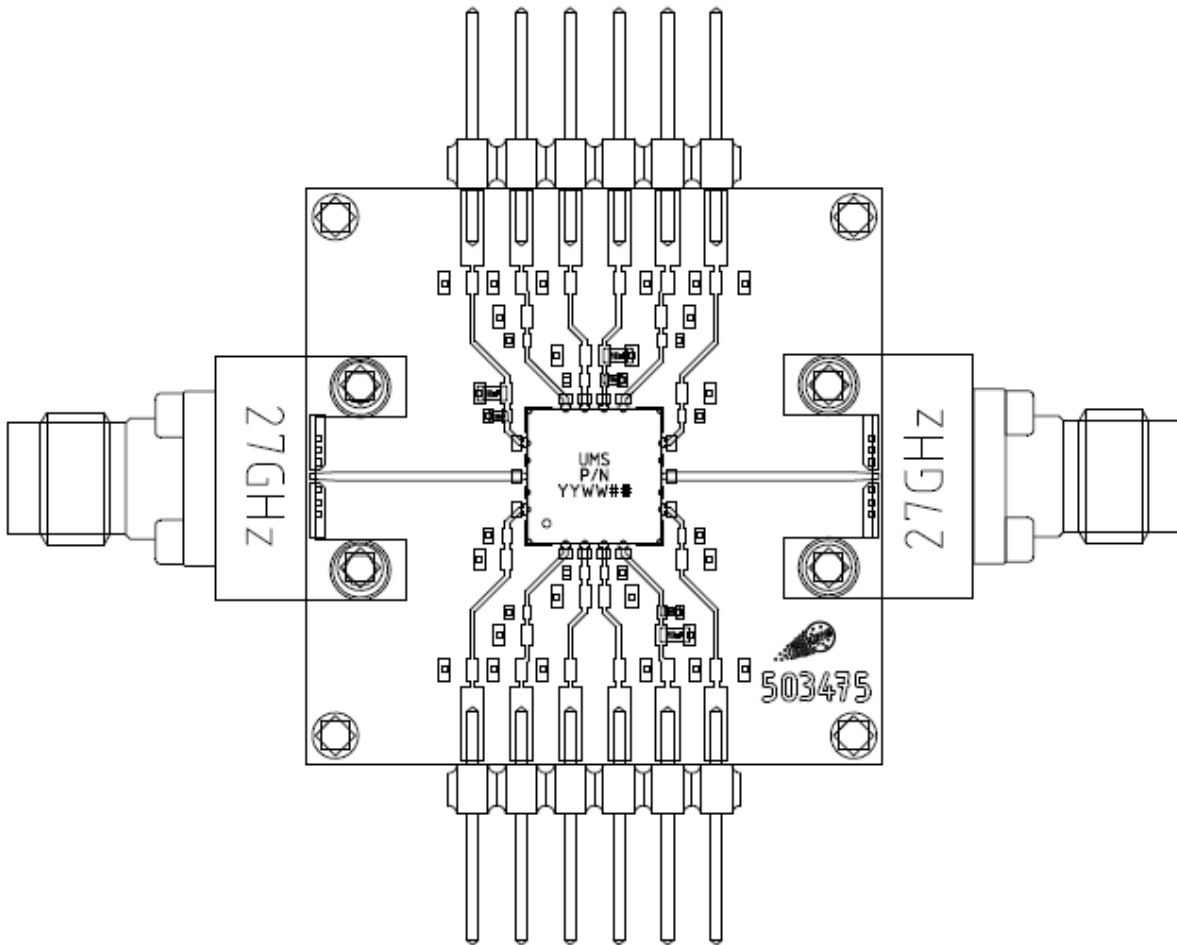

Note: All board measurements are performed using shielded cables, even for DC bias, to ensure safe operation.

DC Schematic

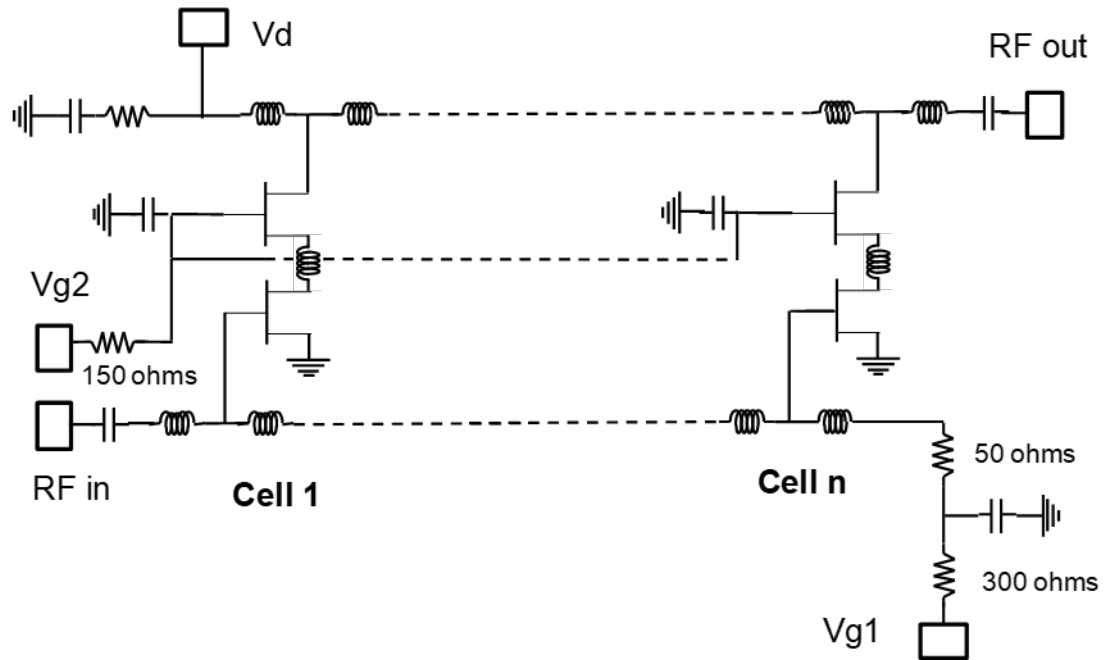

Recommended package footprint for FDB Package

Refer to the application note AN0029 available at <https://www.ums-rf.com> for package footprint recommendations and exact package dimensions.

SMD mounting procedure for FDB Package

For the mounting process standard techniques involving solder paste and a suitable reflow process can be used. For further details, see application note AN0029 available at <https://www.ums-rf.com>.

Recommended environmental management

UMS products are compliant with the regulation in particular with the directives RoHS N°2011/65 and REACH N°1907/2006. More environmental data are available in the application note AN0019 also available at <https://www.ums-rf.com>.

Recommended ESD management

Refer to the application note AN0020 available at <https://www.ums-rf.com> for ESD sensitivity and handling recommendations for the UMS package products.

Ordering Information

FDB 7x7 package:

CHA3024-FDB/XY

Waffle: XY = 24

Information furnished is believed to be accurate and reliable. However **United Monolithic Semiconductors S.A.S.** assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of **United Monolithic Semiconductors S.A.S.**. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. **United Monolithic Semiconductors S.A.S.** products are not authorised for use as critical components in life support devices or systems without express written approval from **United Monolithic Semiconductors S.A.S.**